


VEEDEK

COMMERCIAL ROOFING

DETAILS:

REV: DATE:


VCR0	Cover Sheet	1	Sep 2025
VCR1	Ridge Detail	1	Sep 2025
VCR2	Barge Detail	1	Sep 2025
VCR3	Roof Step Detail	1	Sep 2025
VCR4	Roof Wall Apex Detail	1	Sep 2025
VCR5	Parapet Detail	1	Sep 2025
VCR6	Apron Parallel Detail	1	Sep 2025
VCR7	Apron Transverse Detail	1	Sep 2025
VCR8	Eave - Box Gutter Detail	1	Sep 2025
VCR9	Pipe Penetration Direct Fix Detail	1	Sep 2025
VCR10	Pipe Penetration Back Tray Detail	1	Sep 2025
VCR11	Large Penetration Detail	1	Sep 2025

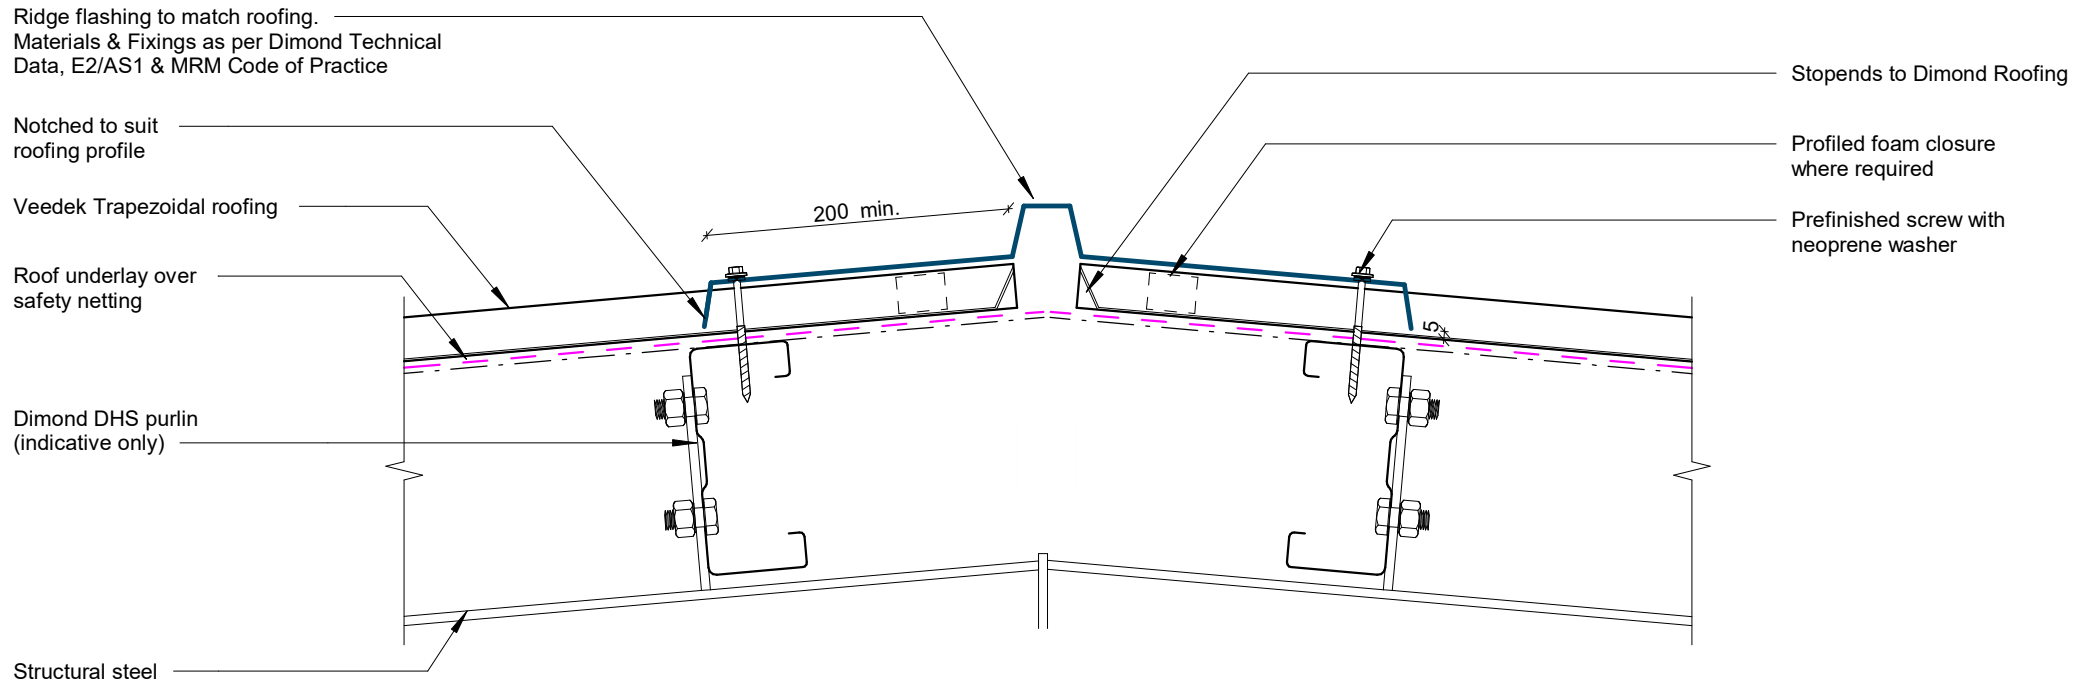

GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.


Ridge Detail

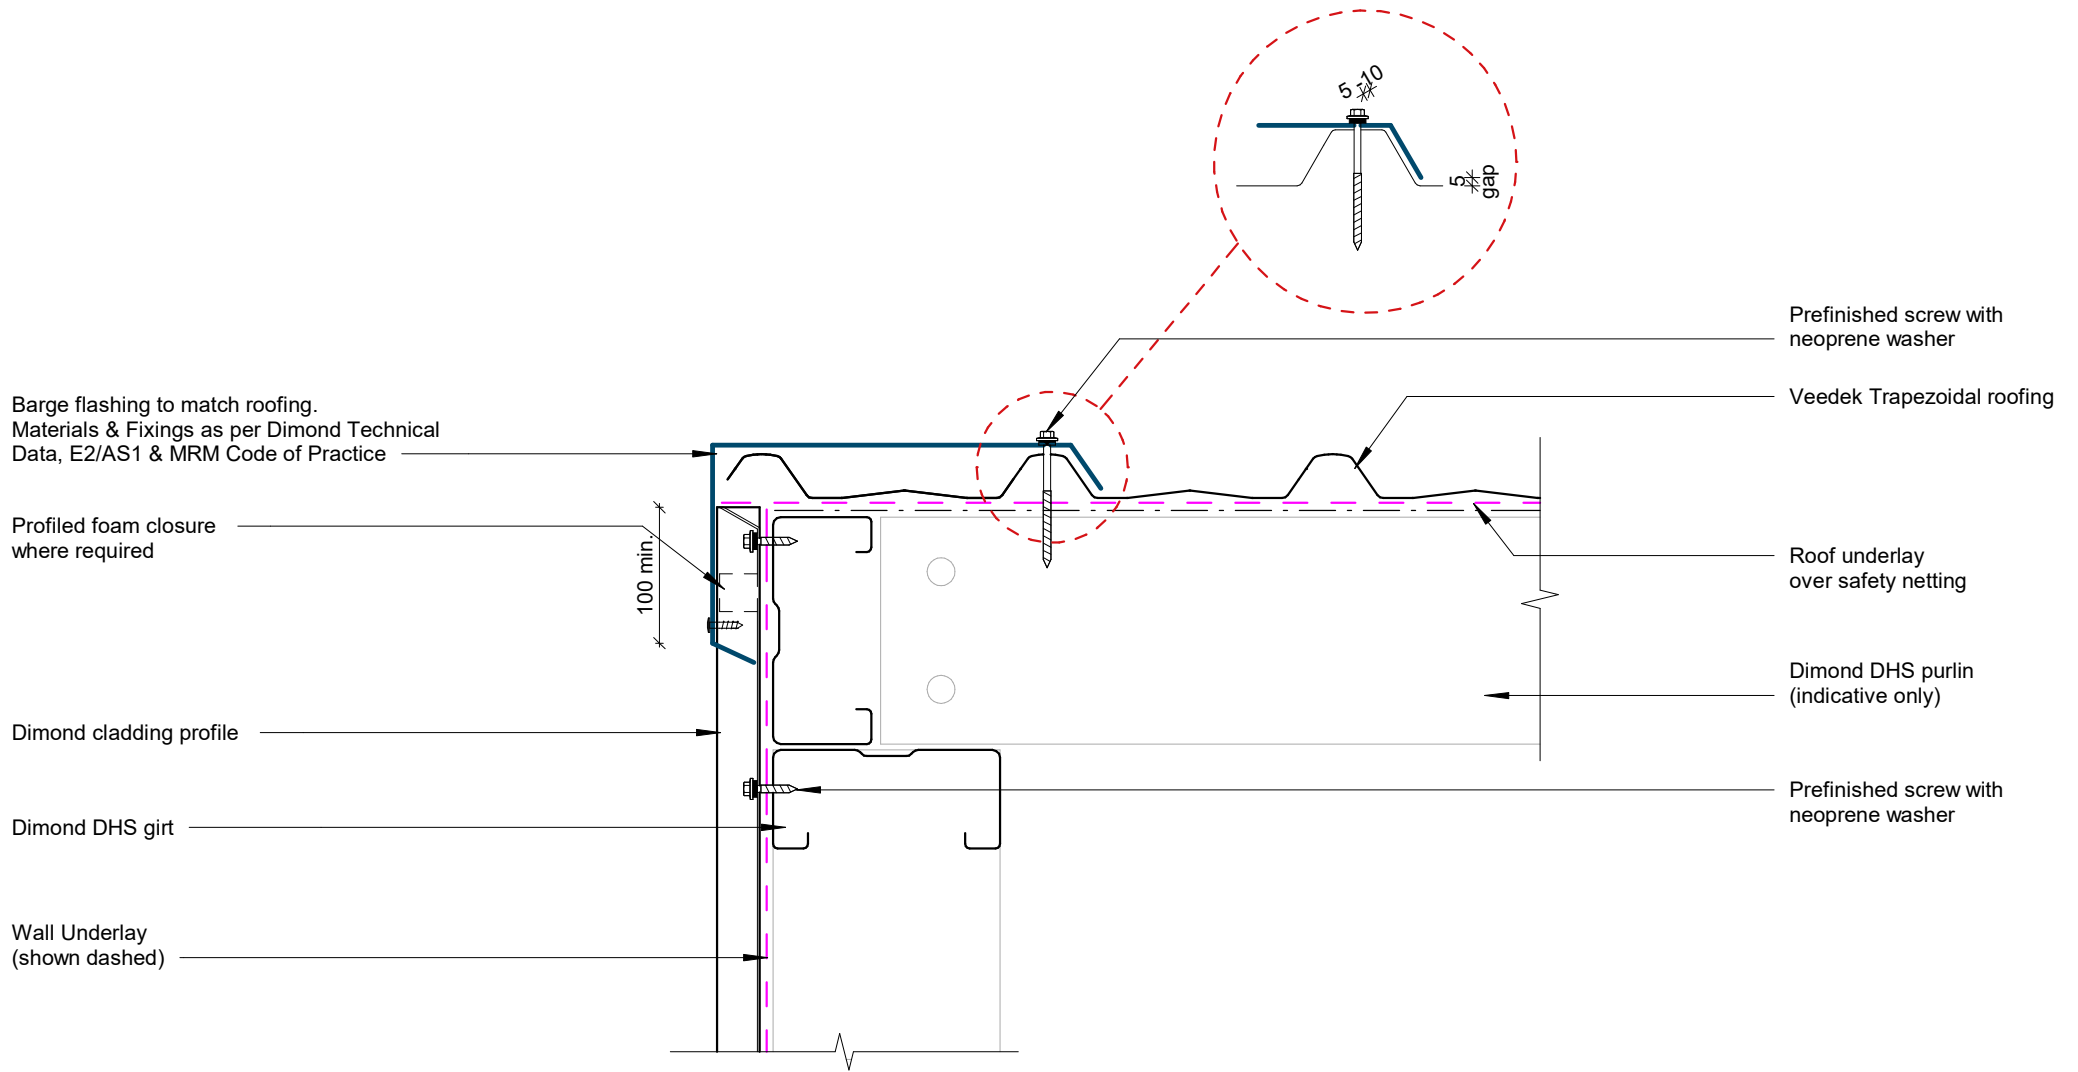

GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.


Barge Detail

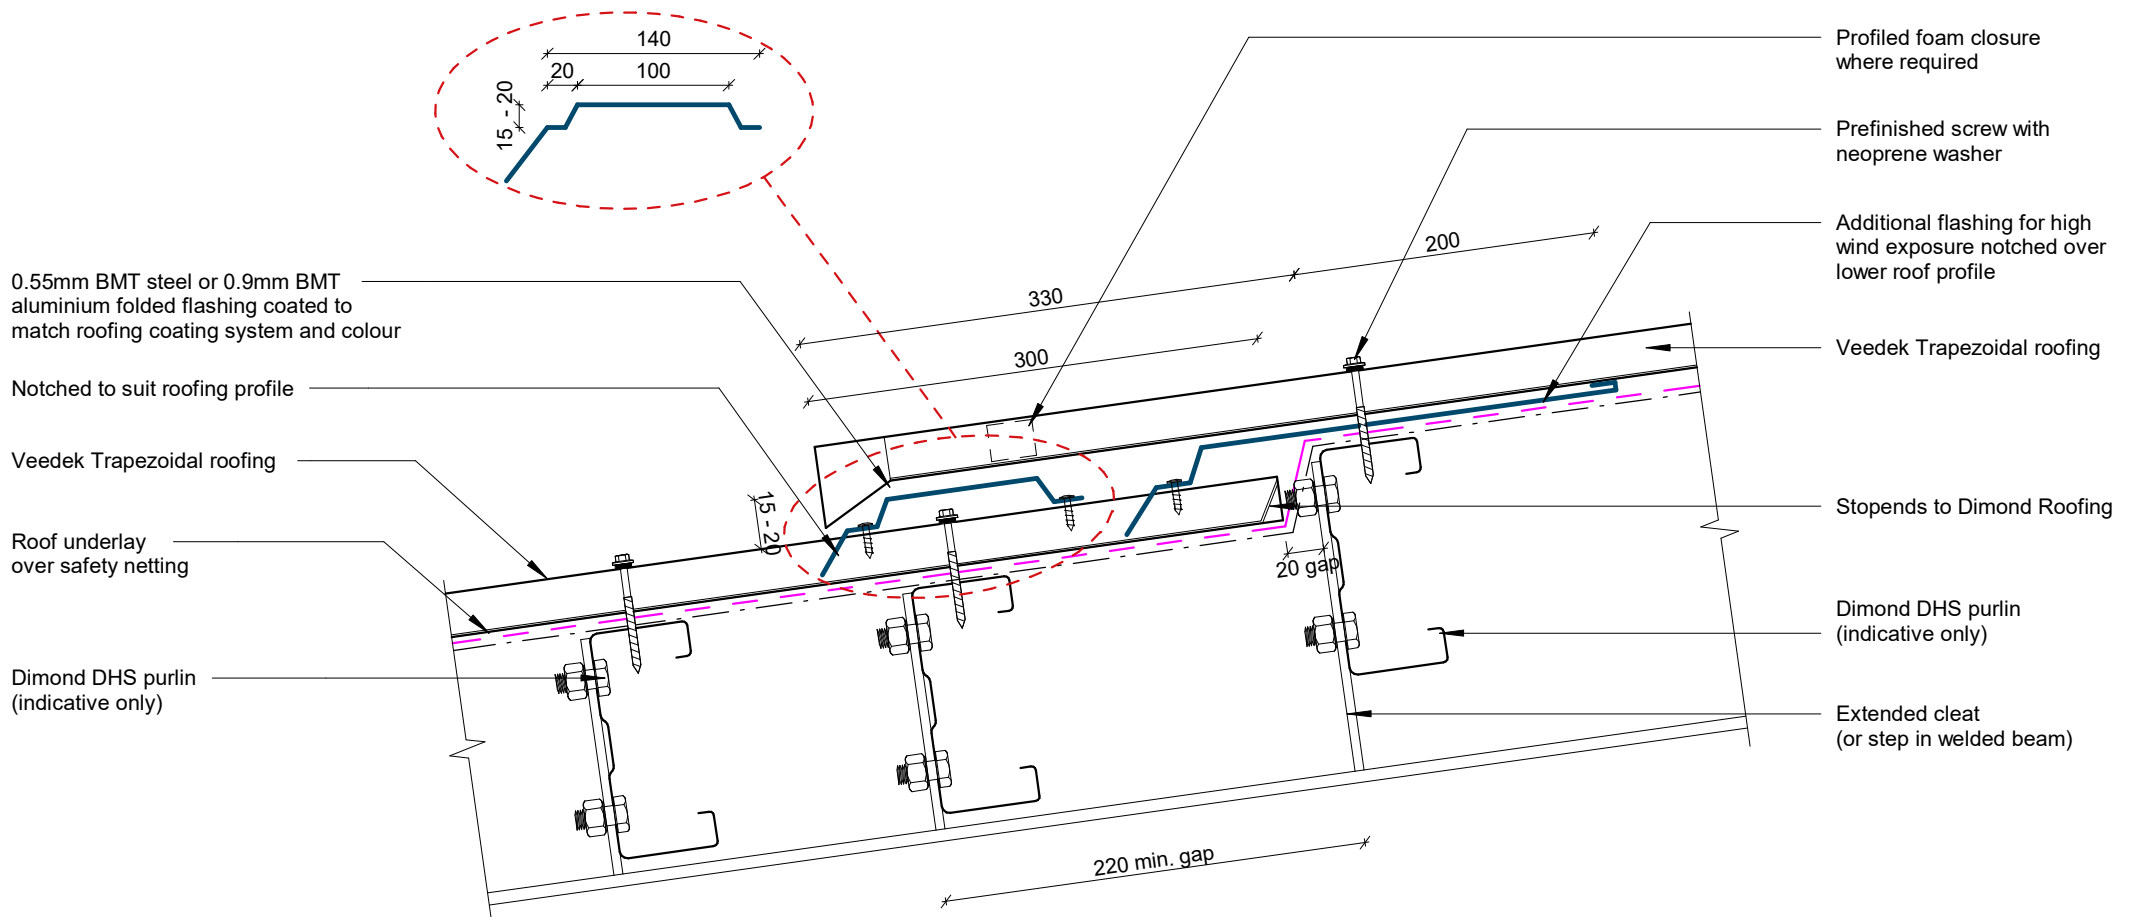

GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.

Roof Step Detail

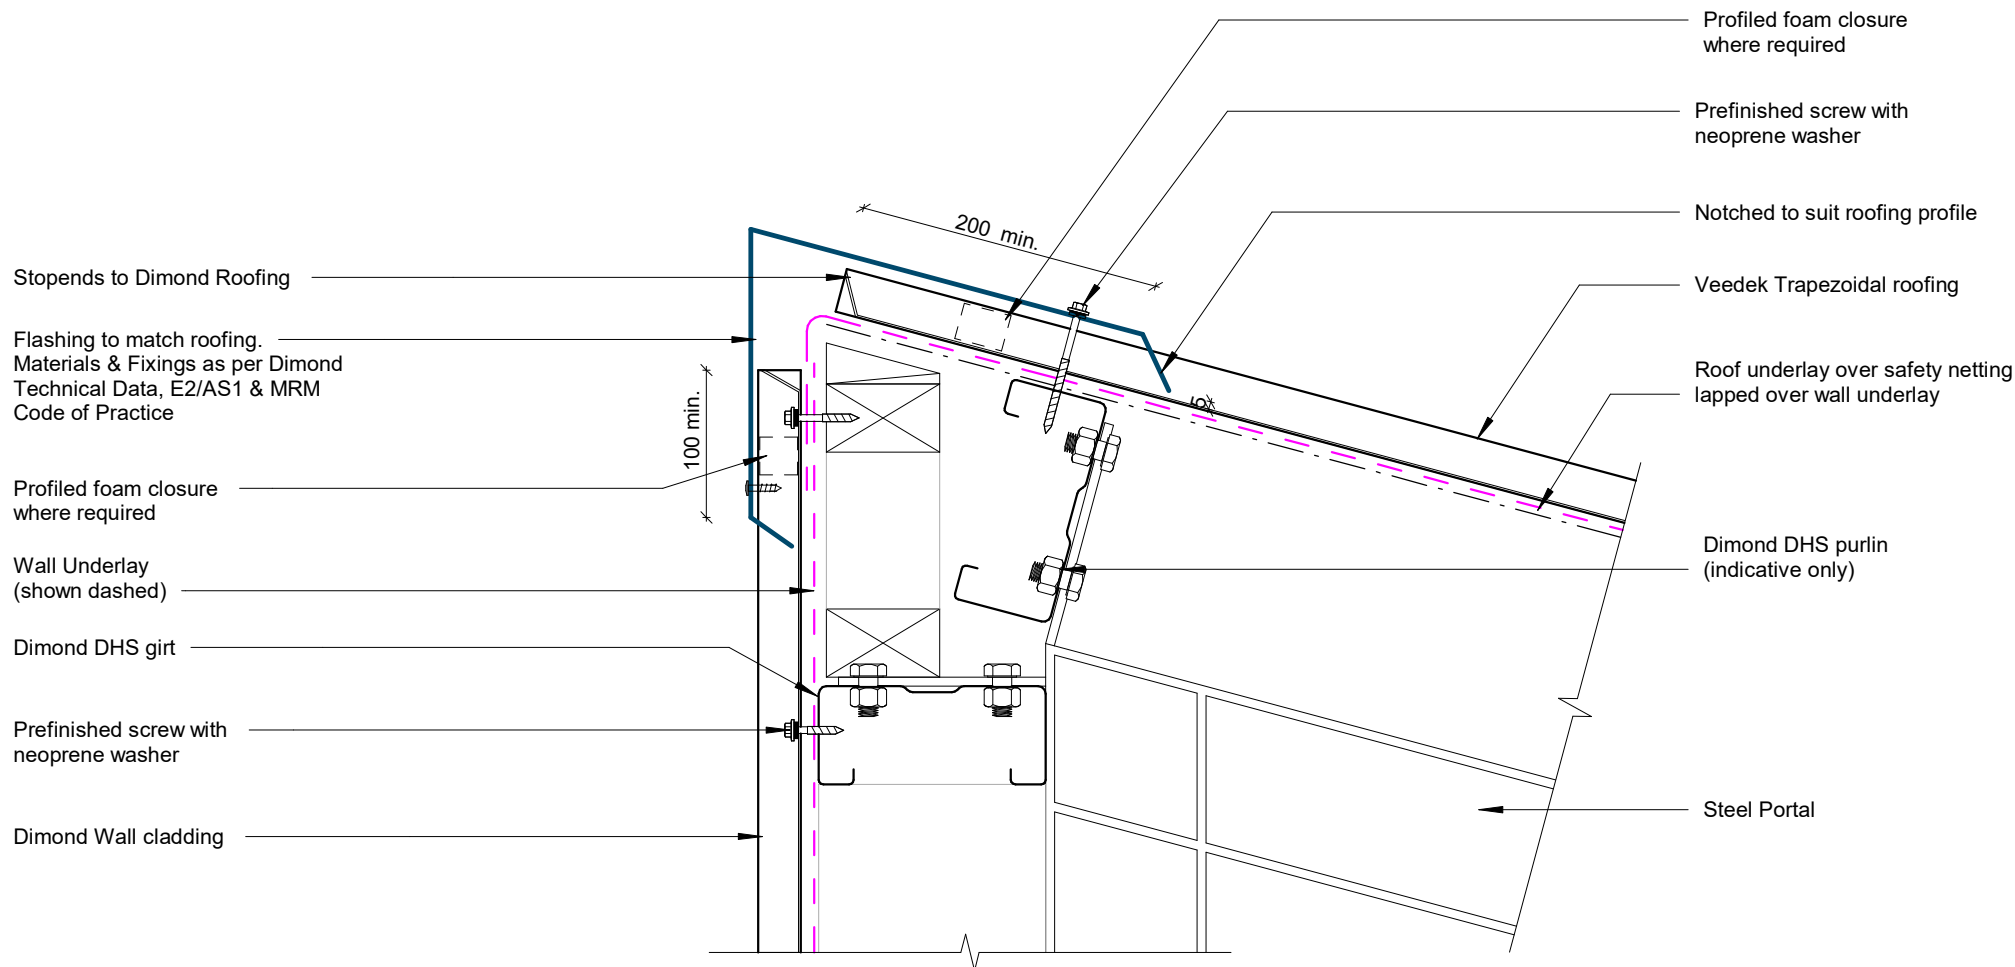


GENERAL NOTE


Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.

Roof Wall Apex Detail

Rev: 1

Veedek Commercial Roofing

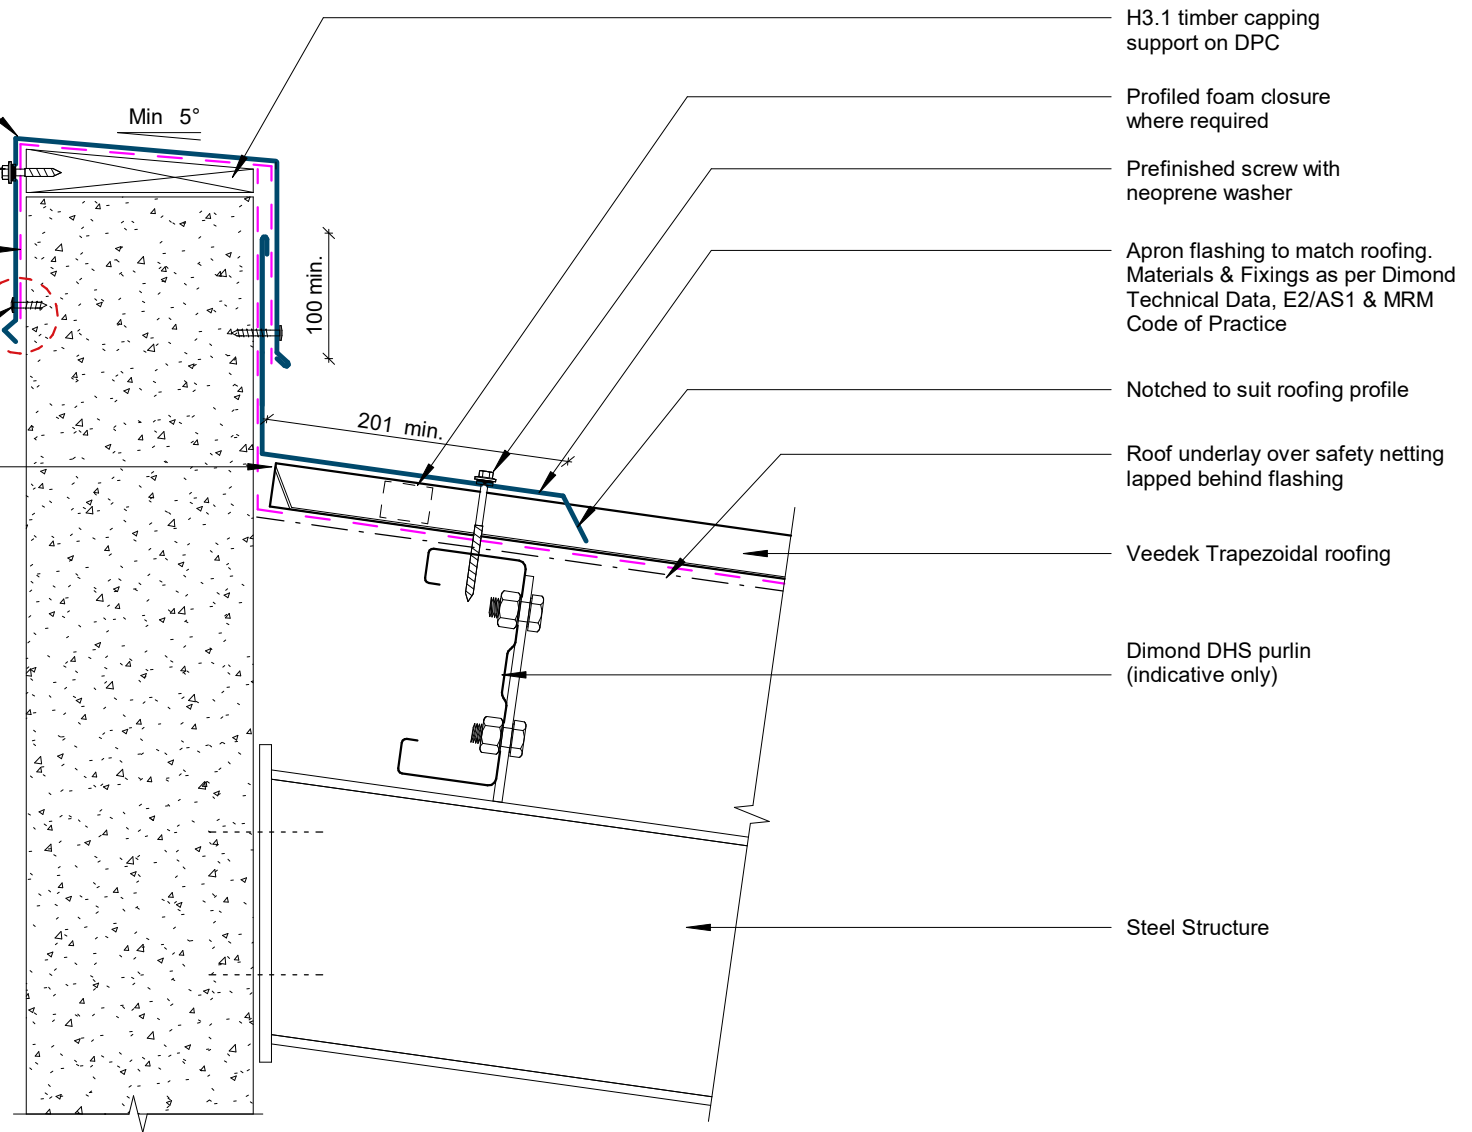


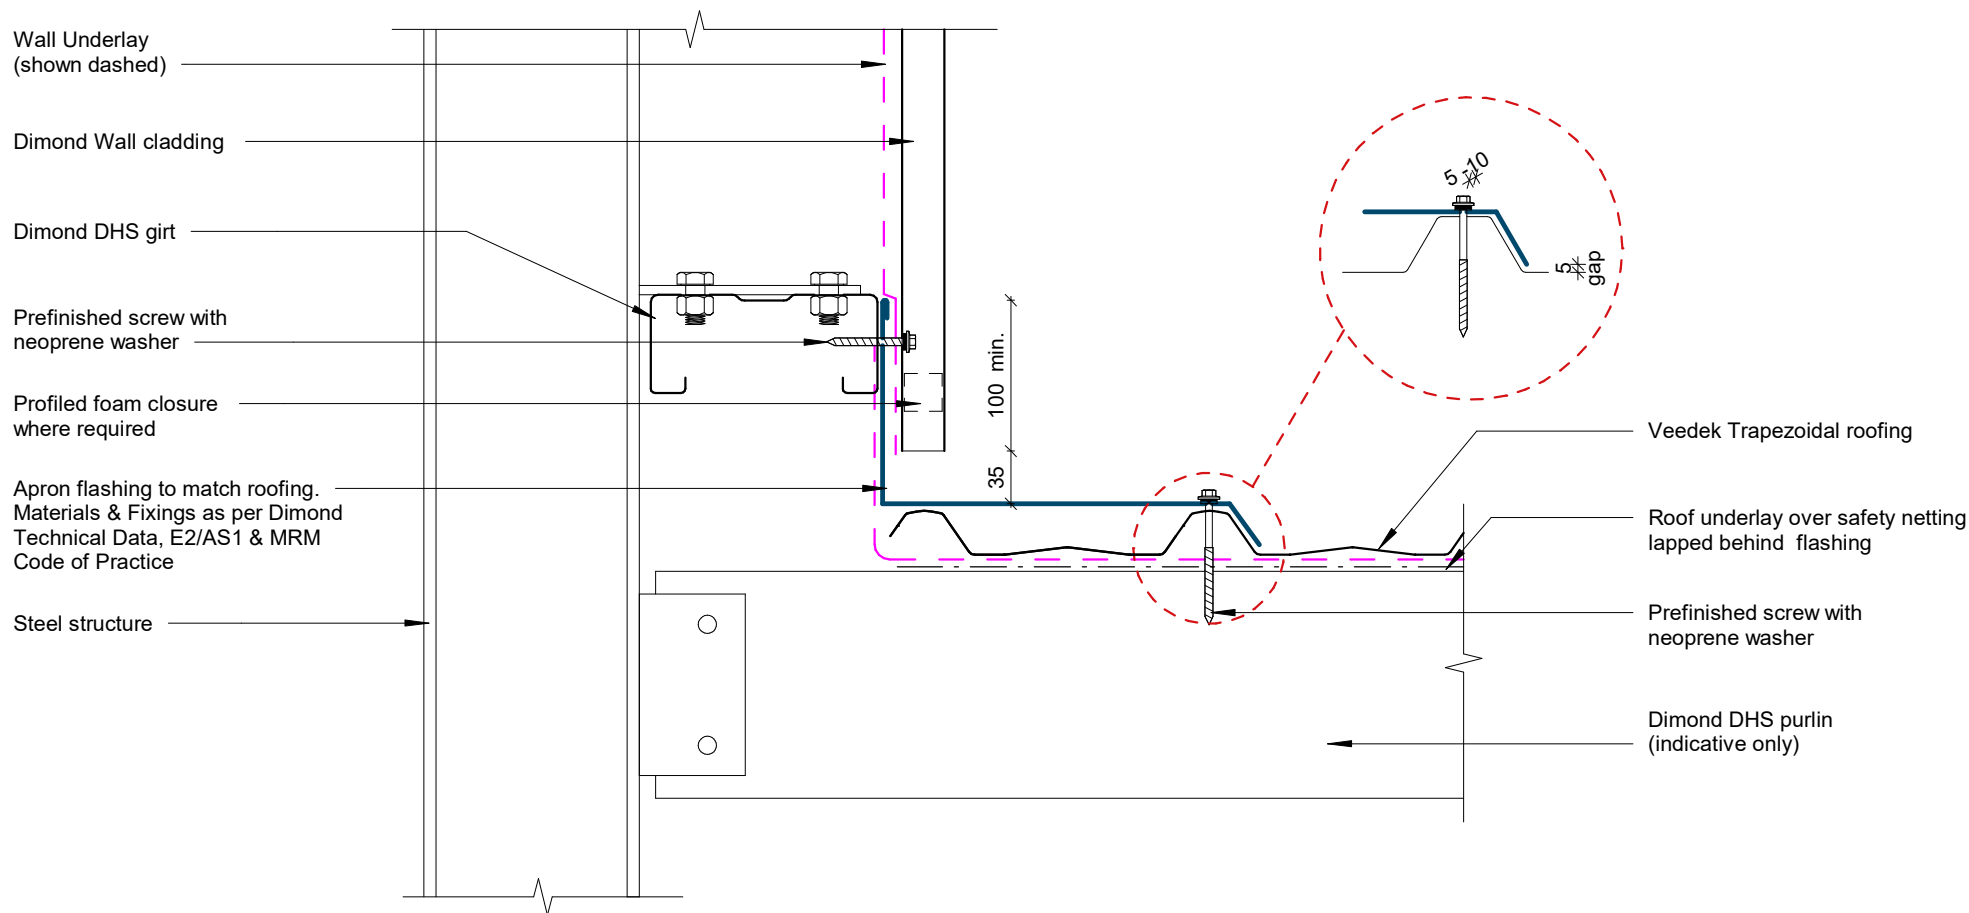

GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.

Apron Parallel Detail

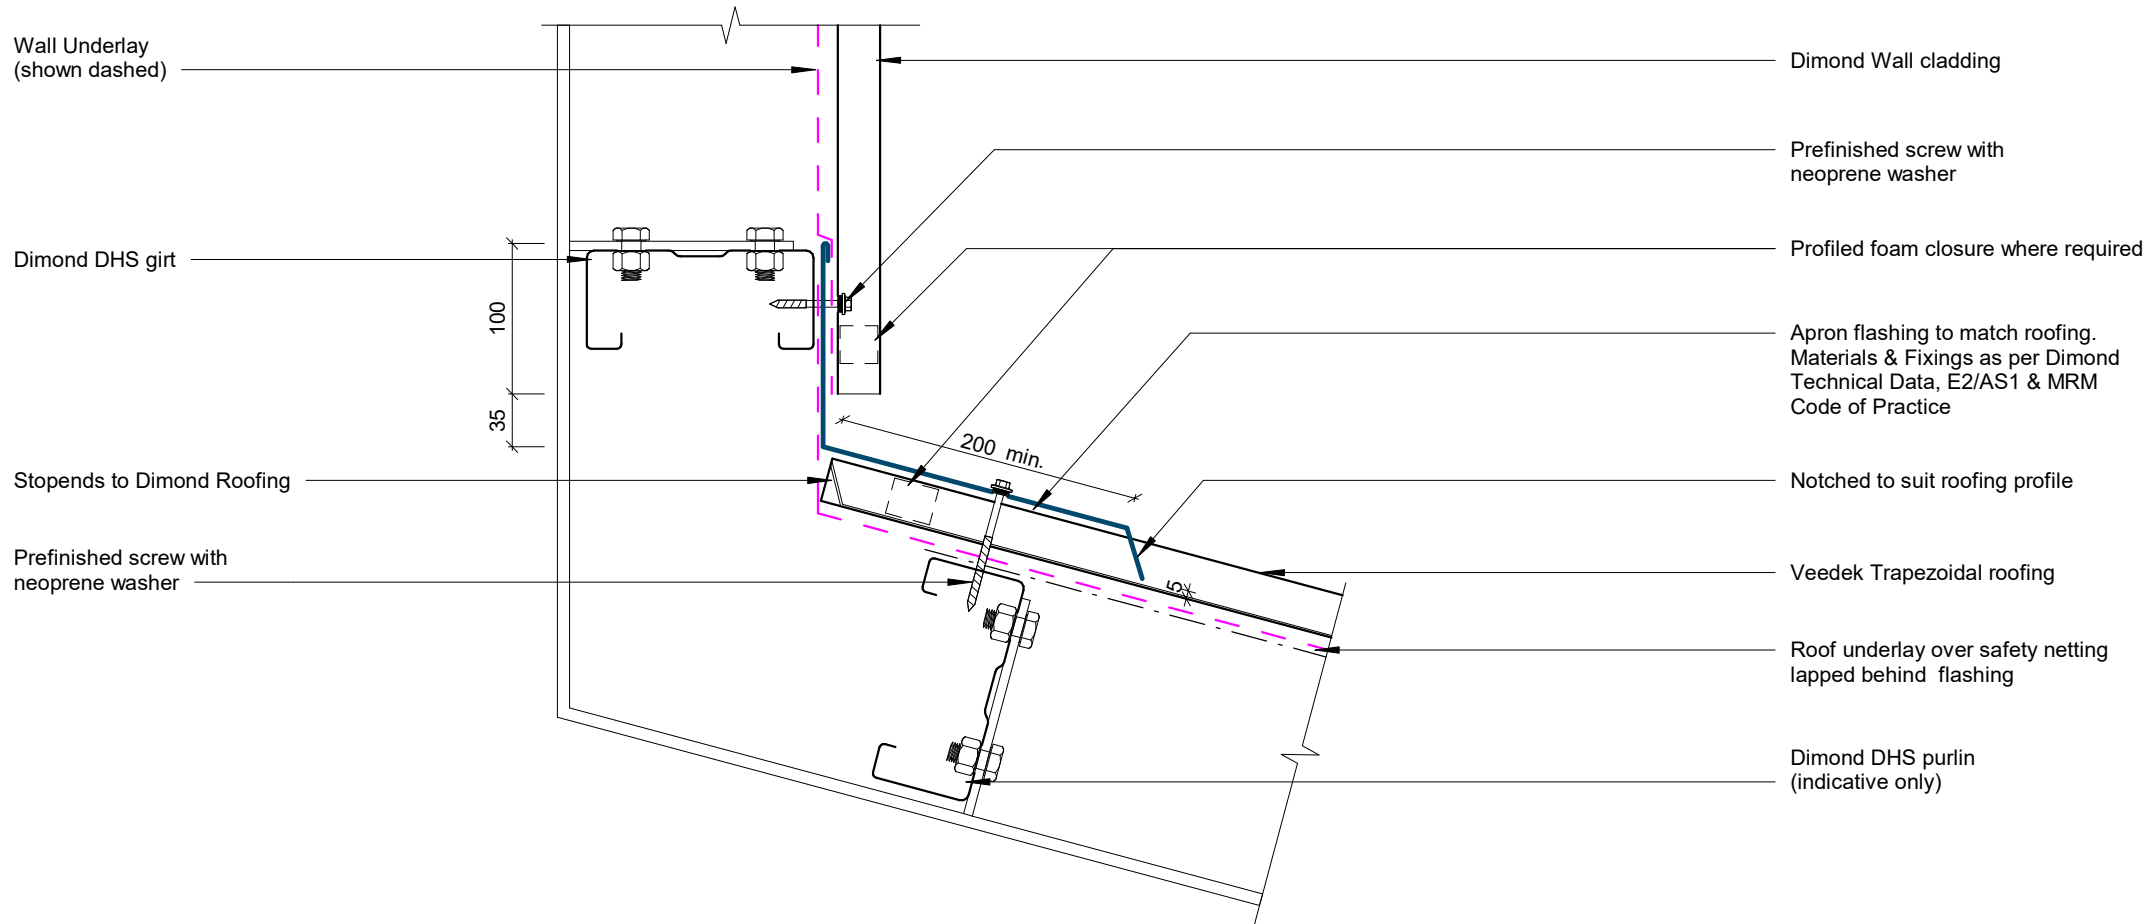


GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.

Apron Transverse Detail

Rev: 1

Veedek Commercial Roofing

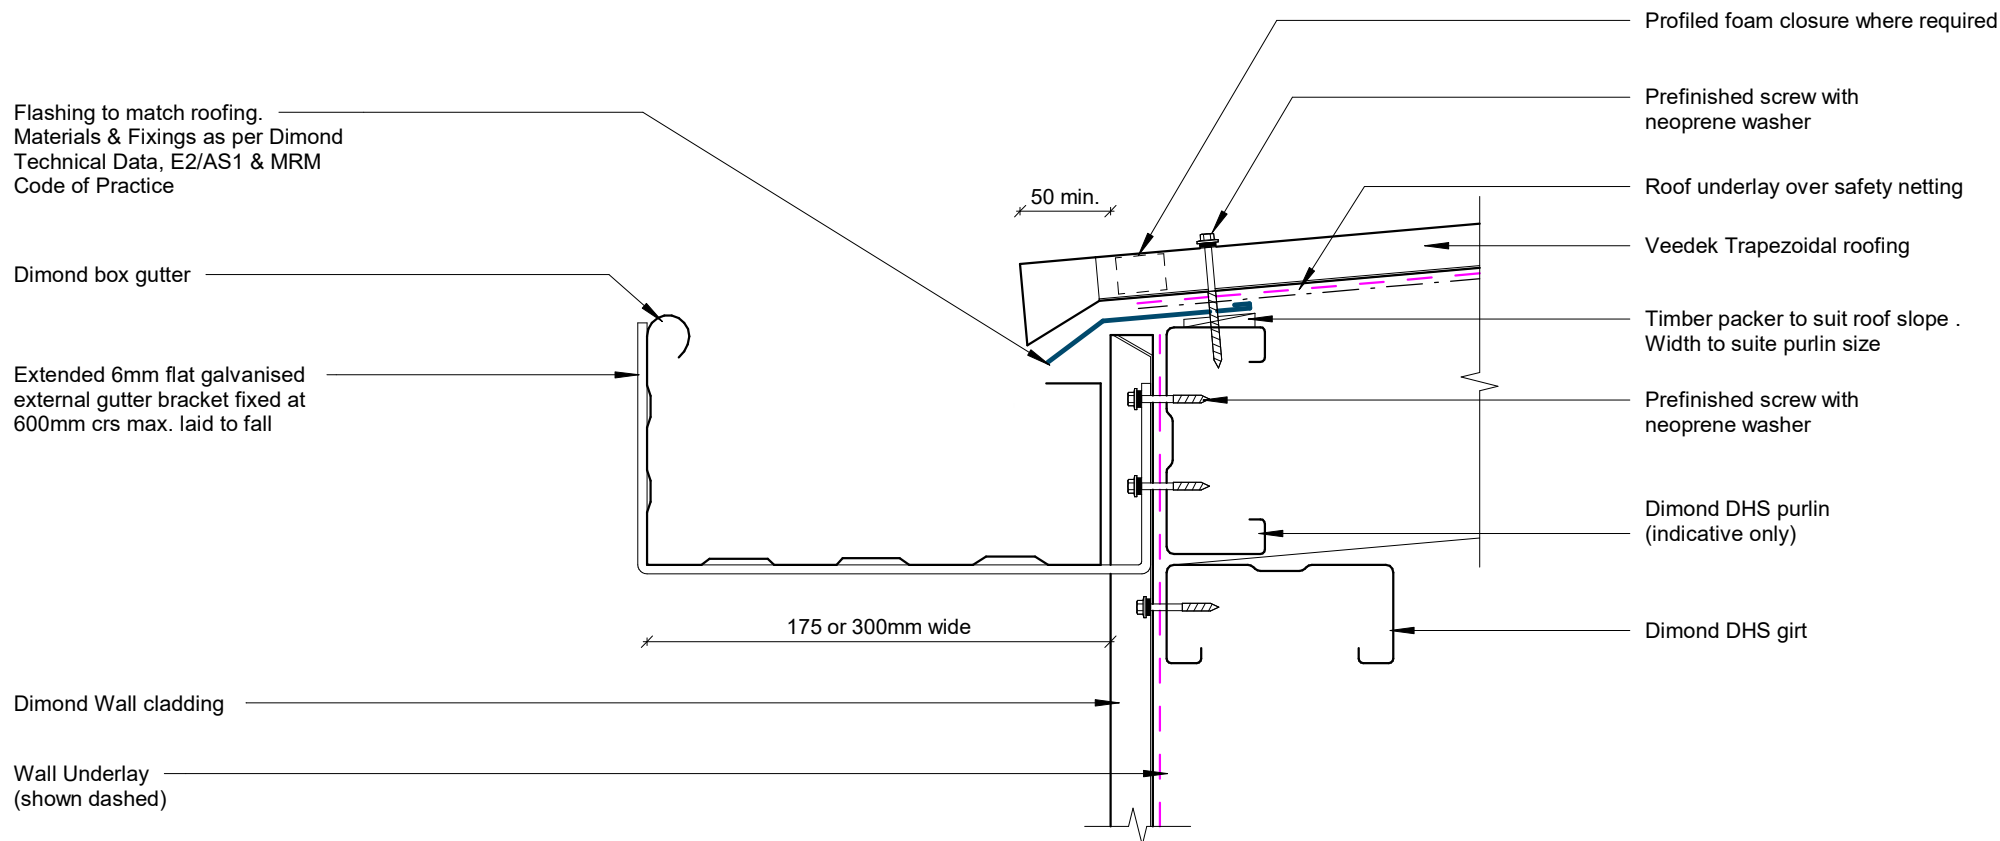

GENERAL NOTE

Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building. Leave foam out if ventilation is required.

Eave - Box Gutter Detail


Rev: 1

Veedek Commercial Roofing

Note:

Min 10° for pipe penetration direct fix boot flashing is applicable for when less than 50% blockage occurs.

When exceeding 50% blockage, refer to back tray boot flashing. Refer MRM code of practice.

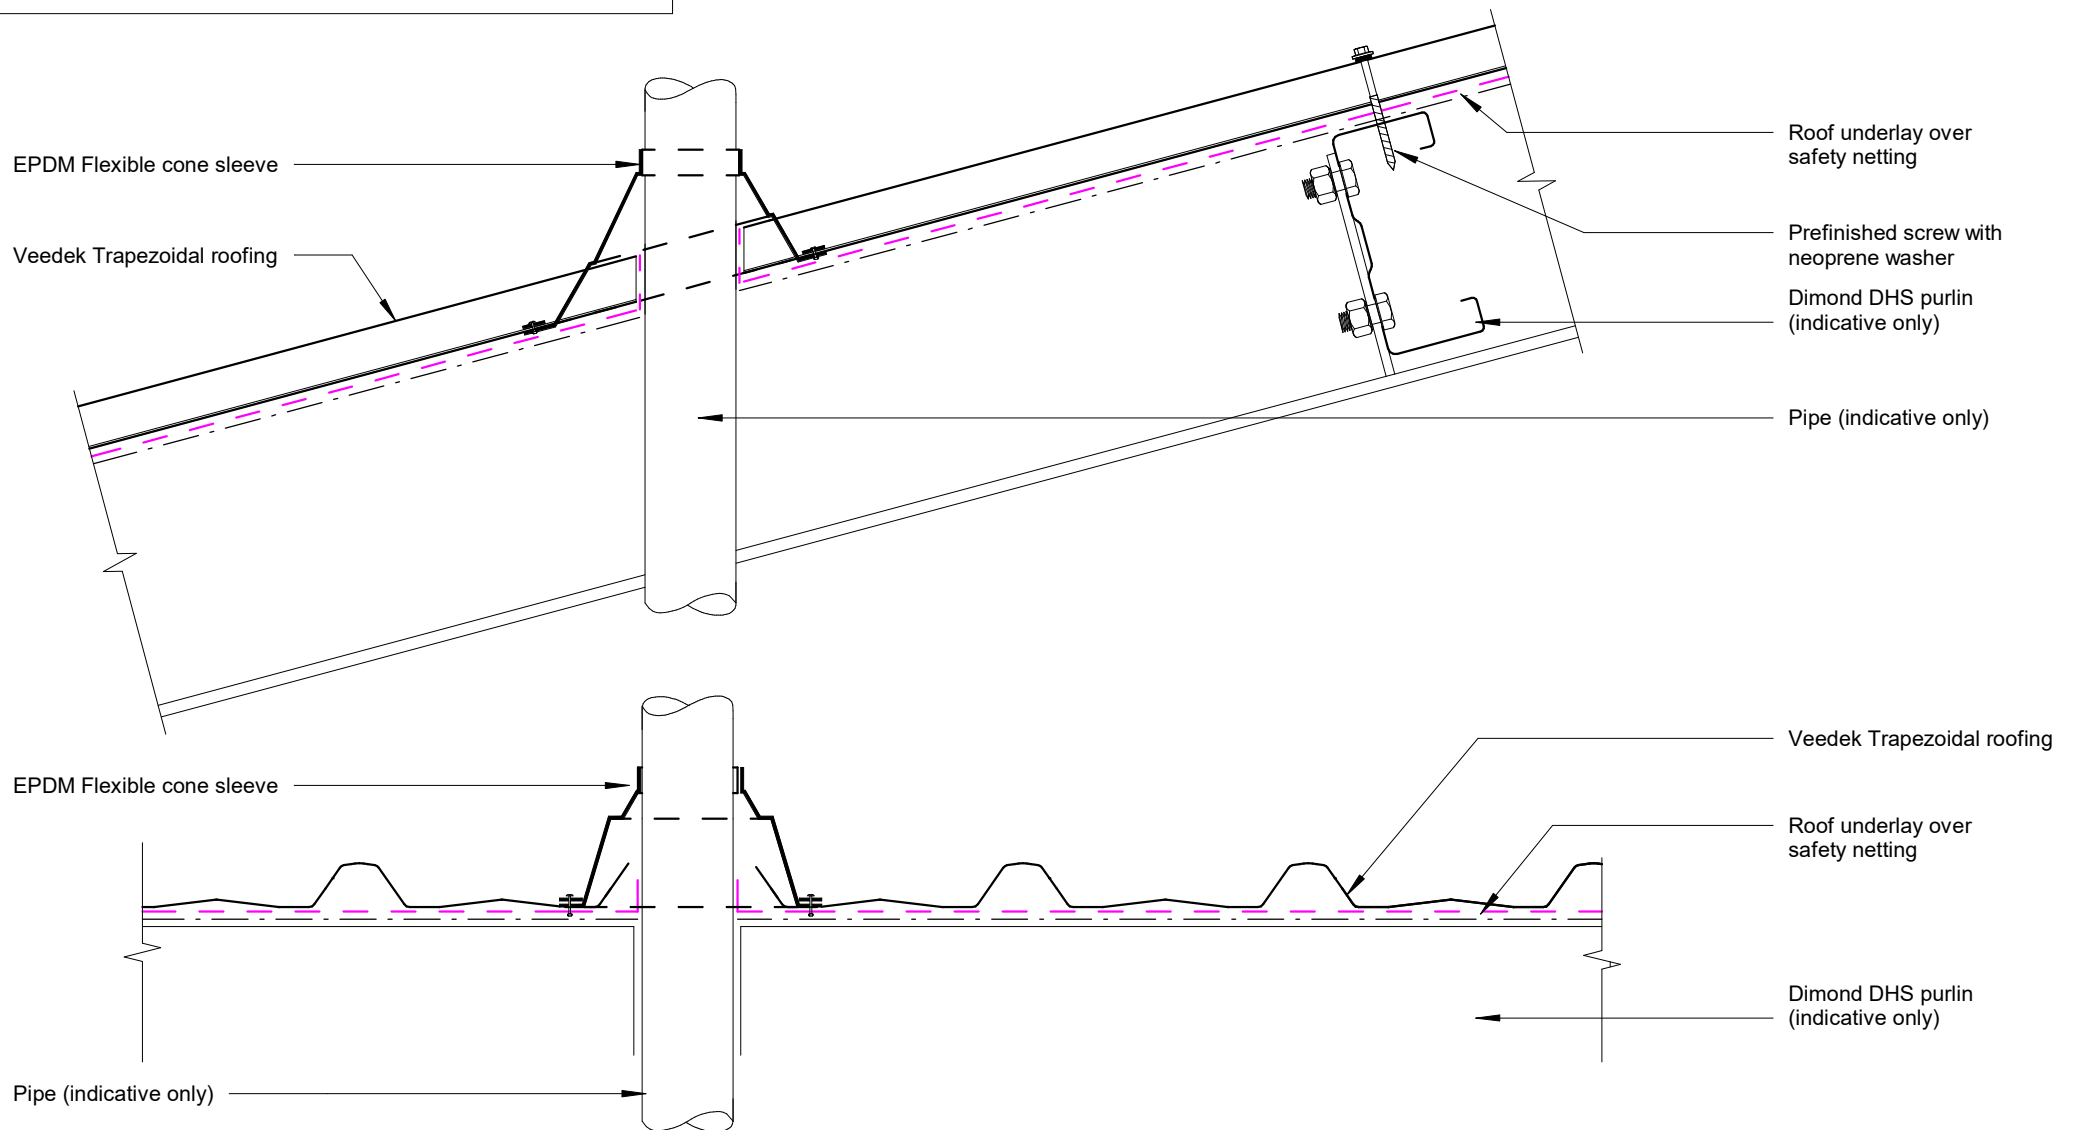


Pipe Penetration Direct Fix Detail

Rev: 1

Veedek Commercial Roofing


Note:
Min 3° for pipe penetration with a boot flashing.
Refer MRM code of practice

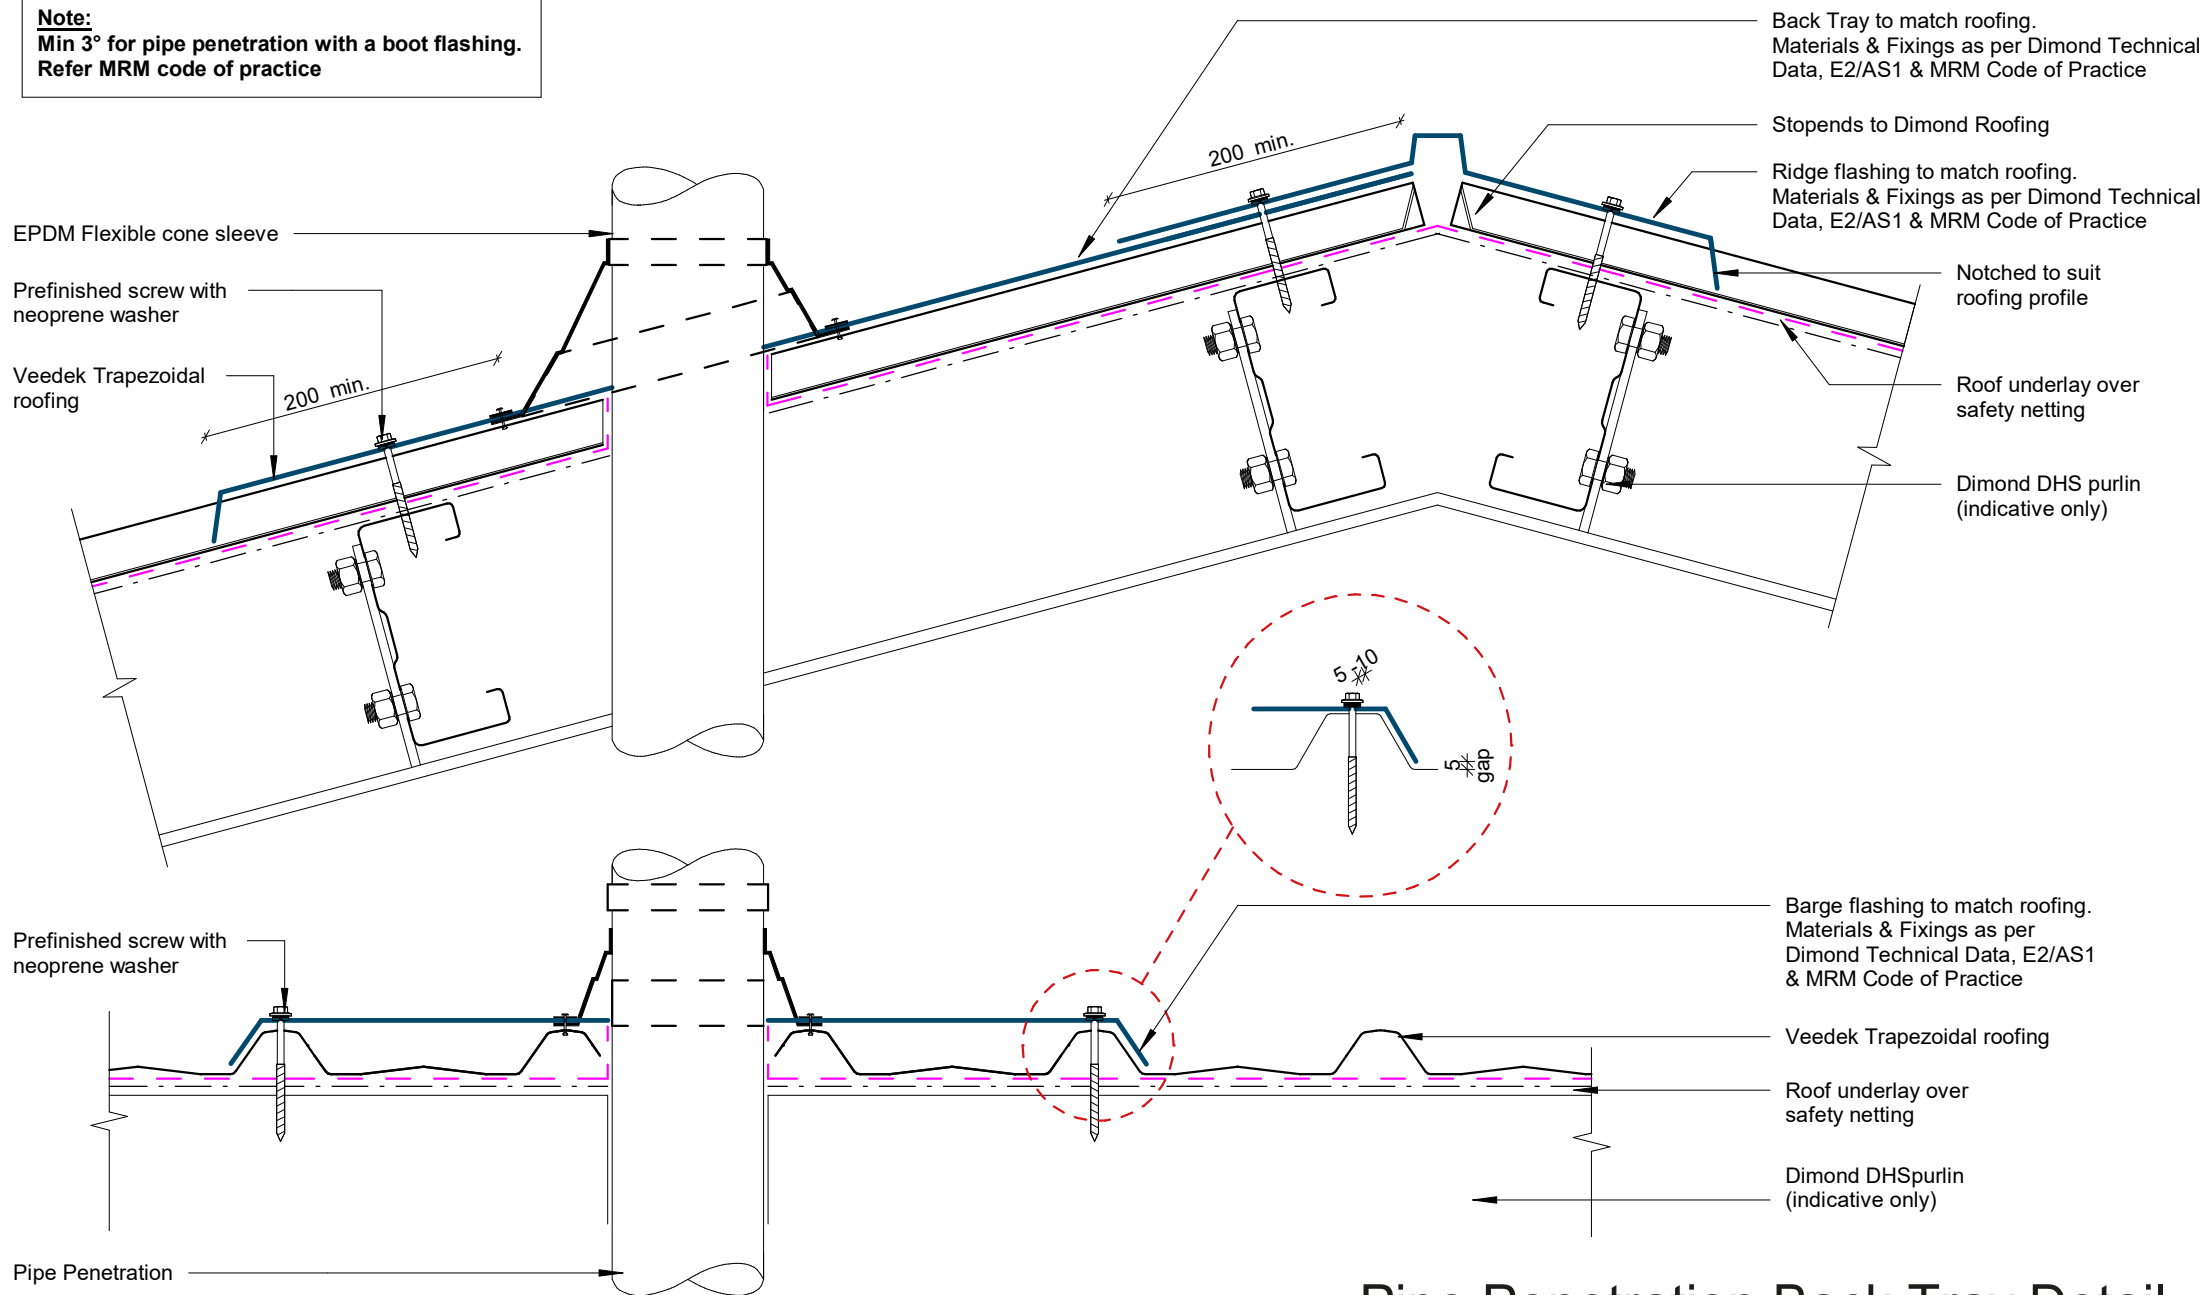

Pipe Penetration Back Tray Detail

Rev: 1

Veedek Commercial Roofing

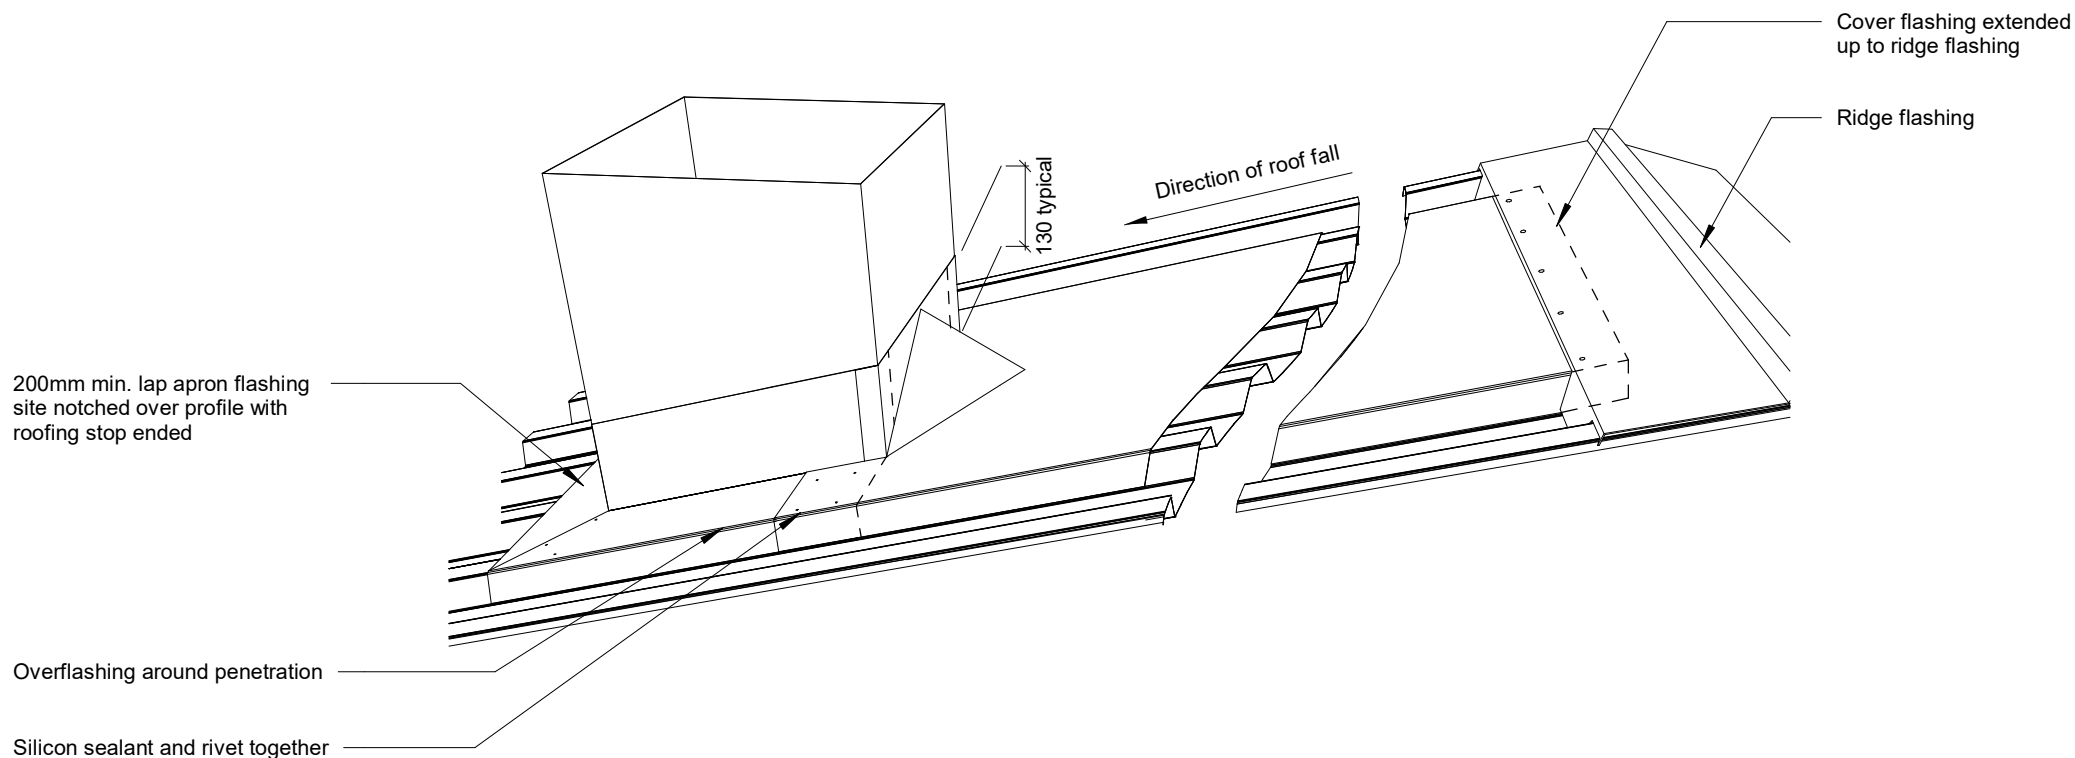

Large Penetration Detail