



Eurotray® in Slate

The peak of design excellence

If style's important; if you're after a roof with elegance and distinction; if only the best will do – choose Dimond® Roofing Eurotray®. Dimond's top-of-the-line Eurotray® range is a proven roof that delivers exceptional durability and performance with sharp, clean lines and timeless style.

This roofing profile is inspired by some of the oldest and grandest buildings in Europe, to match our most contemporary homes. You don't want to settle for second best or anything that will date or deteriorate. Dimond® thinks the same way. So Eurotray® is designed to withstand the harshest of New Zealand's climates without compromising on premium aesthetics.



masterspec partner



Eurotray® Angle Seam

Residential, Wall Cladding, Alpine

A Slightly Bolder Look.

Looking to add interest into your design or project? Consider the bolder look that Eurotray® Angle Seam offers. This member of the Eurotray® family lends itself well not only as a striking roofing profile - but as an exceptional wall cladding solution as well. In cladding situations, Angle Seam can be run both vertically or horizontally. Angle Seam can also be concave curved.


Ratings

AS/NZS4040 Tested
Zinc E2 VM1 Tested

Available in the following materials:

Precious - Aluminium / Copper / VM
Plain - Galvanised / Zn / AL
ColorCote® - ZinaCore™ MagnaFlow™
AlumiGard™

Angle Seam Cross Sectional Profile Drawing

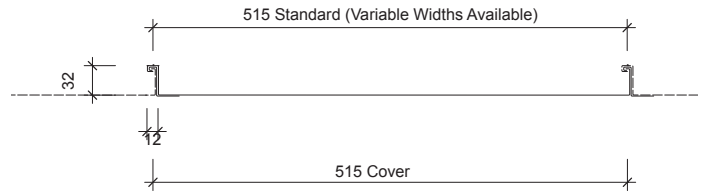

Note: All dimensions are nominal.

Angle Seam Specifications

BMT	Min Pitch	Substrate (Min)	Weight/mtr (ex std)
0.55mm	5°	12.5mm H3 Plywood	2.60
0.70mm Alu	5°	12.5mm H3 Plywood	1.08
0.70mm Cu	5°	12.5mm H3 Plywood	3.00
0.70mm Zn	5°	12.5mm H3 Plywood	3.00



Eurotray® Double Standing Seam

Residential, Wall Cladding, Alpine

Traditional European Design.

Following a traditional European design and exhibiting a modern day seamless appearance, Double Standing Seam is typically specified and formed using higher end materials like copper, zinc and aluminum. Double Standing Seam can be found in a number of architecturally noteworthy designs. Double Standing Seam can also be concave curved giving extra flexibility to the design of your building.


Ratings

AS/NZS4040 Tested
E2 VM1 Tested

Available in the following materials:

Precious - Aluminium / Copper / VM Zinc
ColorCote® - MagnaFlow™

Double Standing Seam Cross Sectional Profile Drawing

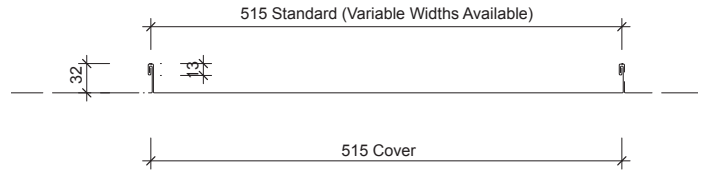

Note: All dimensions are nominal.

Double Standing Seam Specifications

BMT	Min Pitch	Substrate (Min)	Weight/mtr (ex std)
0.55mm	3°	12.5mm H3 Plywood	2.60
0.70mm Alu	3°	12.5mm H3 Plywood	1.08
0.70mm Cu	3°	12.5mm H3 Plywood	3.00
0.70mm ZN	3°	12.5mm H3 Plywood	3.00



Eurotray® Roll Seam

Residential, Wall Cladding, Alpine

Shadowed Elegance.

With shadowed elegance, this simple but stylish profile can be formed from steel based materials as well as copper and zinc. Creating a slightly softer finish and a larger shadow effect than Eurotray® Roll Cap, Eurotray® Roll Seam can be machine curved to a tight radius allowing for more expressive detailing. Eurotray® Roll Seam can also be concave curved.


Ratings

AS/NZS4040 Tested
E2 VM1 Tested

Available in the following materials:

Precious - Aluminium / Copper / VM Zinc
Plain - Galvanised / ZN / AL
ColorCote® - ZinaCore™ MagnaFlow™
AlumiGard™

Roll Seam Cross Sectional Profile Drawing

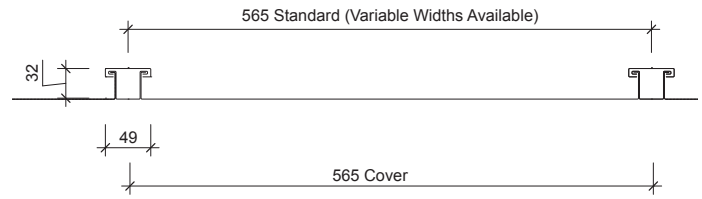

Note: All dimensions are nominal.

Roll Seam Specifications

BMT	Min Pitch	Substrate (Min)	Weight/mtr (ex std)
0.55mm	5°	12.5mm H3 Plywood	2.60
0.70mm Alu	5°	12.5mm H3 Plywood	1.08
0.70mm Cu	5°	12.5mm H3 Plywood	3.00
0.70mm Zn	5°	12.5mm H3 Plywood	3.00
0.90mm Alu	5°	12.5mm H3 Plywood	1.39



Eurotray[®] Roll Cap

Residential, Wall Cladding, Alpine

A New Zealand Inspired Profile.

A New Zealand inspired design and the most popular profile of the Eurotray family, Eurotray[®] Roll Cap offers clean lines and a uniquely robust and distinctive look. Visualise the traditional timber board and batten look and then imagine this in metal and you have Roll Cap. The profile is ideally suited to withstand New Zealand's harshest climates.


Ratings

AS/NZS4040 Tested
E2 VM1 Tested

Available in the following materials:

Plain - Galvanised / Zu / AL
ColorCote[®] - ZinaCore[™] MagnaFlow[™]
AlumiGard[™]

Roll Cap Cross Sectional Profile Drawing

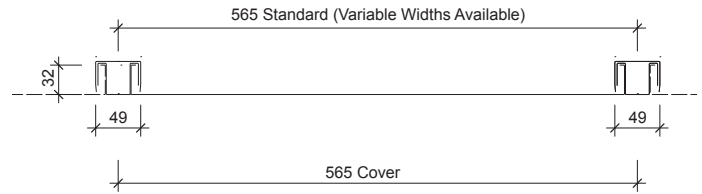

Note: All dimensions are nominal.

Roll Cap Specifications

BMT	Min Pitch	Substrate (Min)	Weight/mtr (ex std)
0.55mm	5°	12.5mm H3 Plywood	2.60
0.70 Alu	5°	12.5mm H3 Plywood	1.08
0.90 Alu	5°	12.5mm H3 Plywood	1.39





Design Note

Oil canning, flatness or waviness is a condition that may occur (1) during the roll forming process, (2) under thermal expansion or (3) during the installation process. It may be more noticeable with wide panned profiles or when using softer materials like aluminium.

This does not cause any damage to the product, however the builder/architect needs to be aware that this may affect aesthetic outcomes. Please refer to the NZ Metal Roofing Code Practice- Section 2.3.5

June 2018

0800 DIMOND
dimond.co.nz

 **Dimond Roofing™**