

0.55mm Flashing fixed with M6 x 25 Roofzip to a Dimond thermal expansion flashing clip every 2nd pan.

Continuous clip fixed with M6 x 25 Roofzip

Dimondek® 630 roofing (specify thickness and coating)

Roofing underlay and netting shown dashed


DHS girt

Line of structure

Notes:

- Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.
- Leave foam out if ventilation is required.
- These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

130 mm min. medium wind speed areas or pitches greater than 10°.  
200 mm min. high wind speed areas and higher or pitches less than 10°.

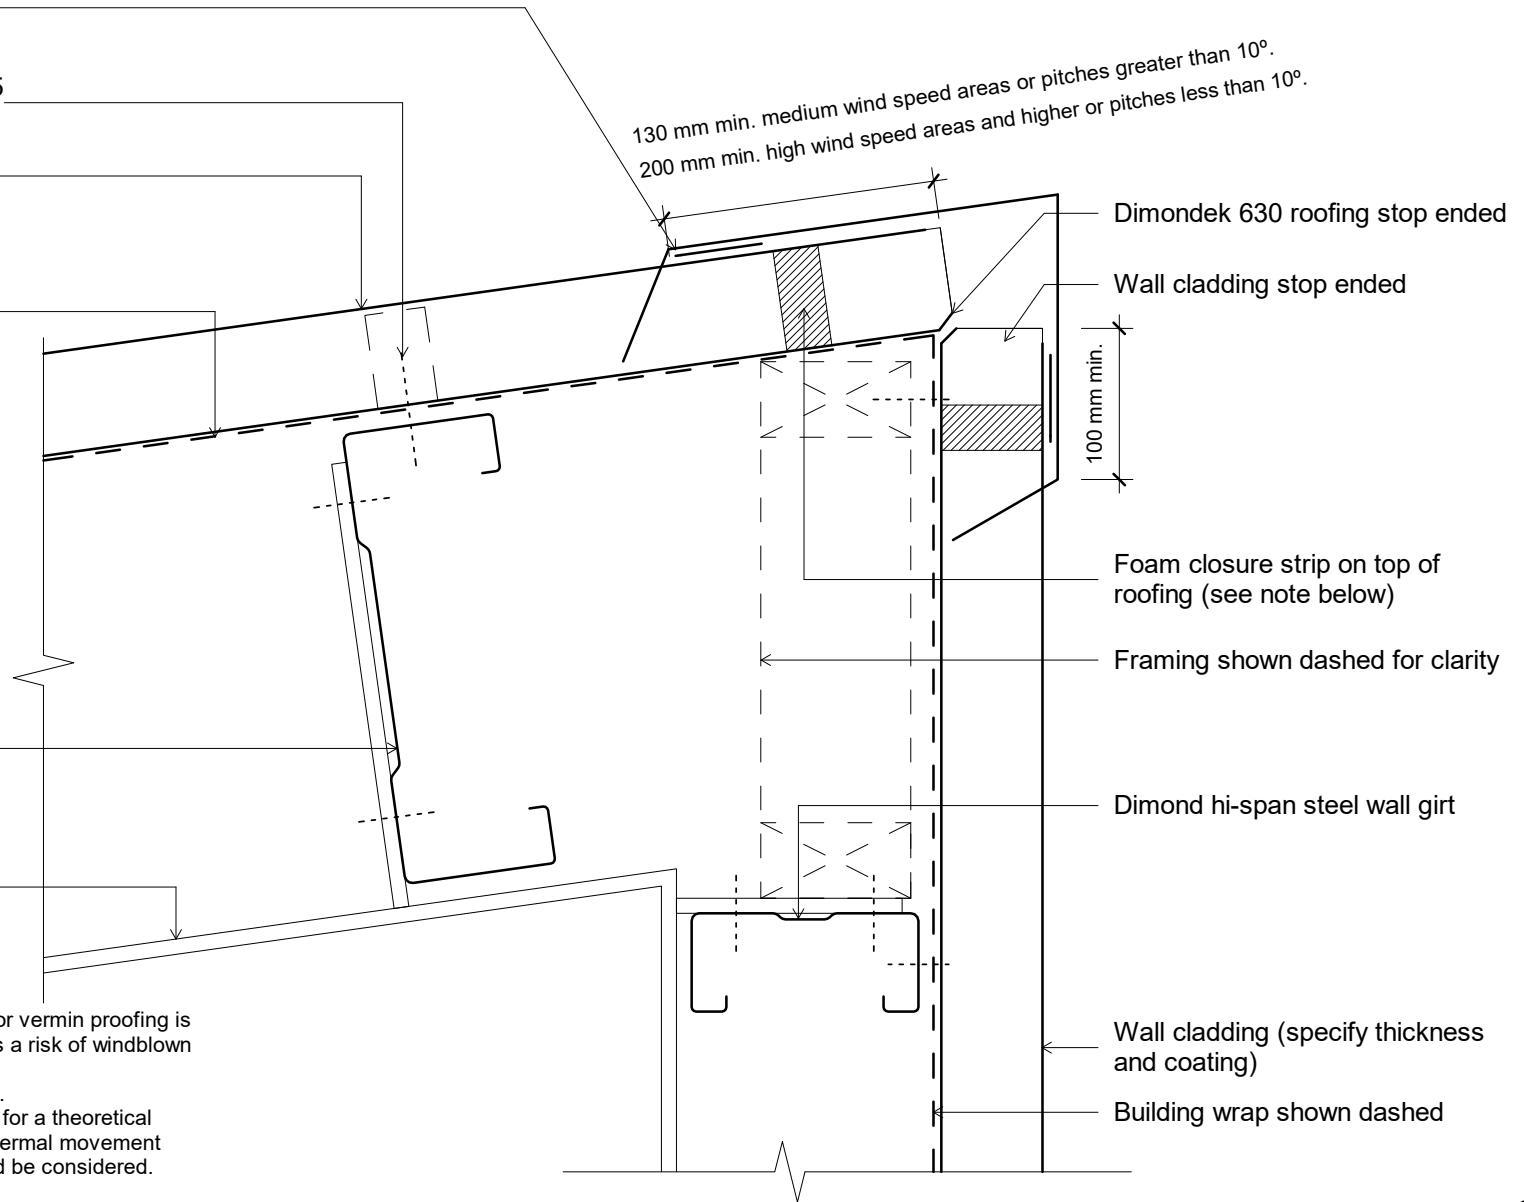

Original Size A4



# Dimondek 630

## Roof

Roof - Wall Apex

File:	dim_dd6_1060 Roof - Wall Apex	
Issue:	01	Reference
Scale:	1 : 5	
Date:	28 November 2018	
		dim_dd6_1060