


- 4x 12g x 20mm tek screw
- Zincalume or 0.55mm colour finish to match existing
- Foam closure strip on top of roofing (see note below)
- 40mmx5mm galvanised brackets
- 4.8 dia Rivets at 300 centres
- Dimond Solar-Rib® roofing (specify thickness and coating)
- Roofing underlay and netting shown dashed
- DHS girt
- Line of structure

Notes:
 - Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.
 - These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

Ridge ventilator table					
A	B	C	D	E	F
150	160	60	80	85	55
300	310	100	100	150	100
450	430	160	120	200	150
500	488	240	150	225	175
600	558	250	180	250	200

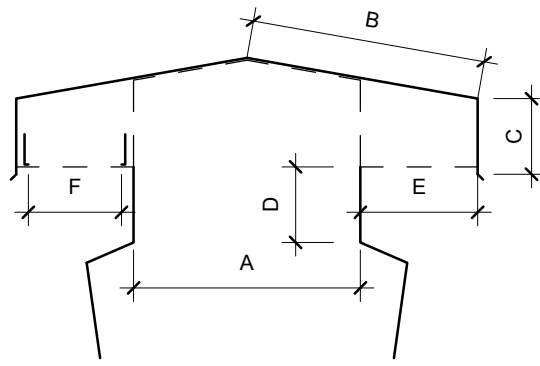

Line of structure

Original Size A4



Solar Rib
 Roof
 Ridged Ventilators Detail

dim_sor_1190 Ridged Ventilators Detail	
Issue: 01	Reference
Scale: As indicated	
Date: 20 December 2018	
dim_sor_1190	