




Notes:

- These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.
- Where CCA or ACQ treated cavity battens are installed a barrier between the batten and the cladding is required.

Original Size A4

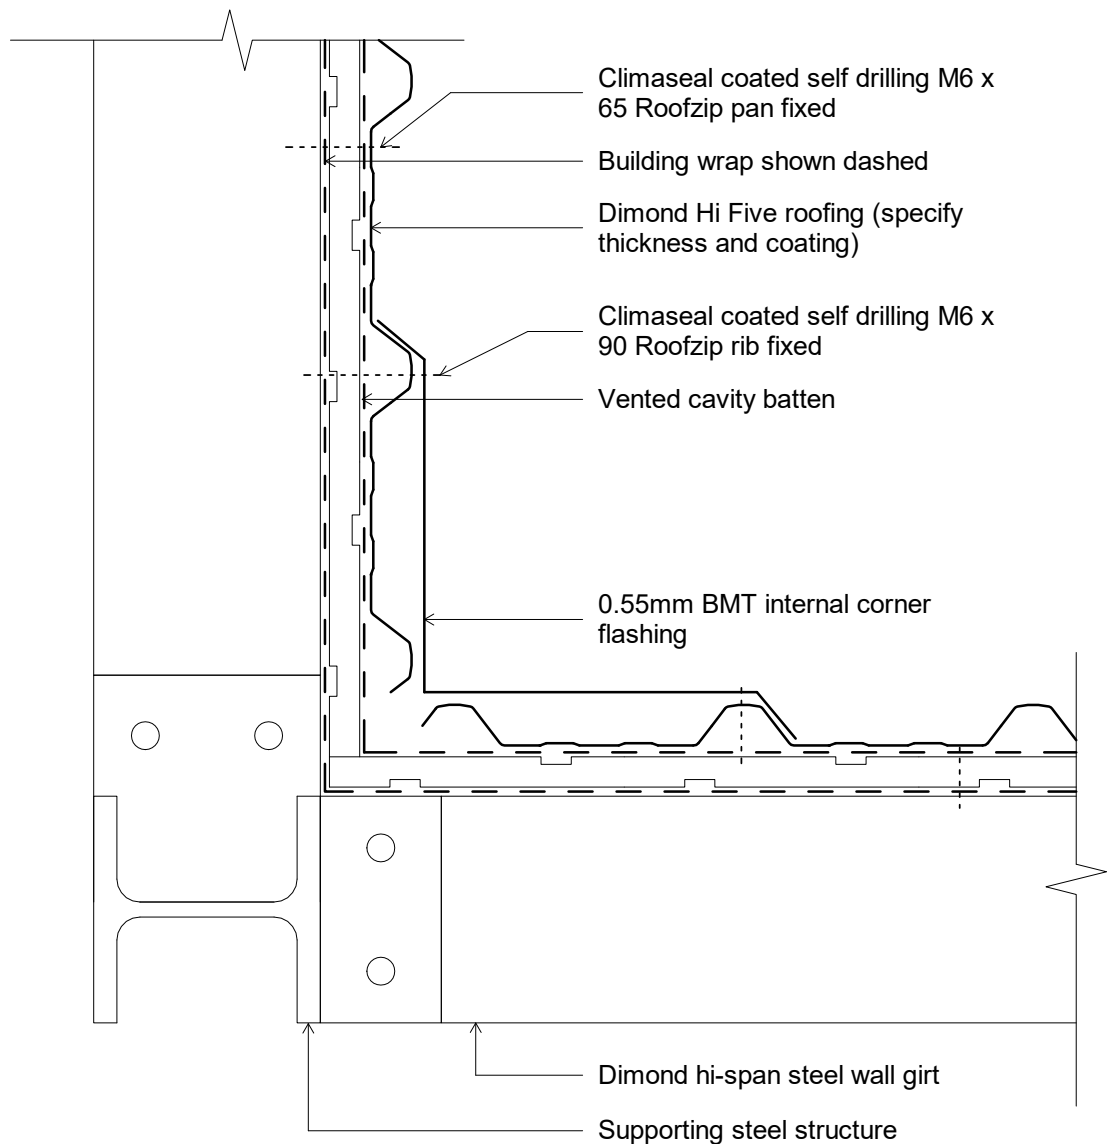

Hi Five Wall

Vertical Non-cavity Cladding - Internal Corner

dim_hif_2010 Vertical Non-cavity Cladding - Internal Corner		
Issue:	01	Reference dim_hif_2010
Scale:	1 : 5	
Date:	20 December 2018	