

Dimond Galvanised Roof Rail laid  
and fixed over every purlin

Notched to have 3mm clearance  
around profile to allow for  
ventilation

Dimond roofing (specify profile,  
thickness and coating) fixed to  
Dimond roof rail with 12g hex head  
tek screw (Length to suit profile)

Solitex Mento 1000 connect  
underlay laid vertically over PIR

Hex head 14g - 10x Length  
(Depending on Enertherm  
thickness specified) @ 150 centres

Enertherm ALU Rigid Insulation.  
Depth as specified


12g x 20mm tek screw pan fixed  
every pan

Flashing and fire stop to Fire  
Engineer's design to meet fire  
engineering requirements.

Dimond Hi-Span steel purlin  
(Specify size) , For timber purlins  
use minimum 70mm wide purlins  
Line of structure

Notes:

- Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.

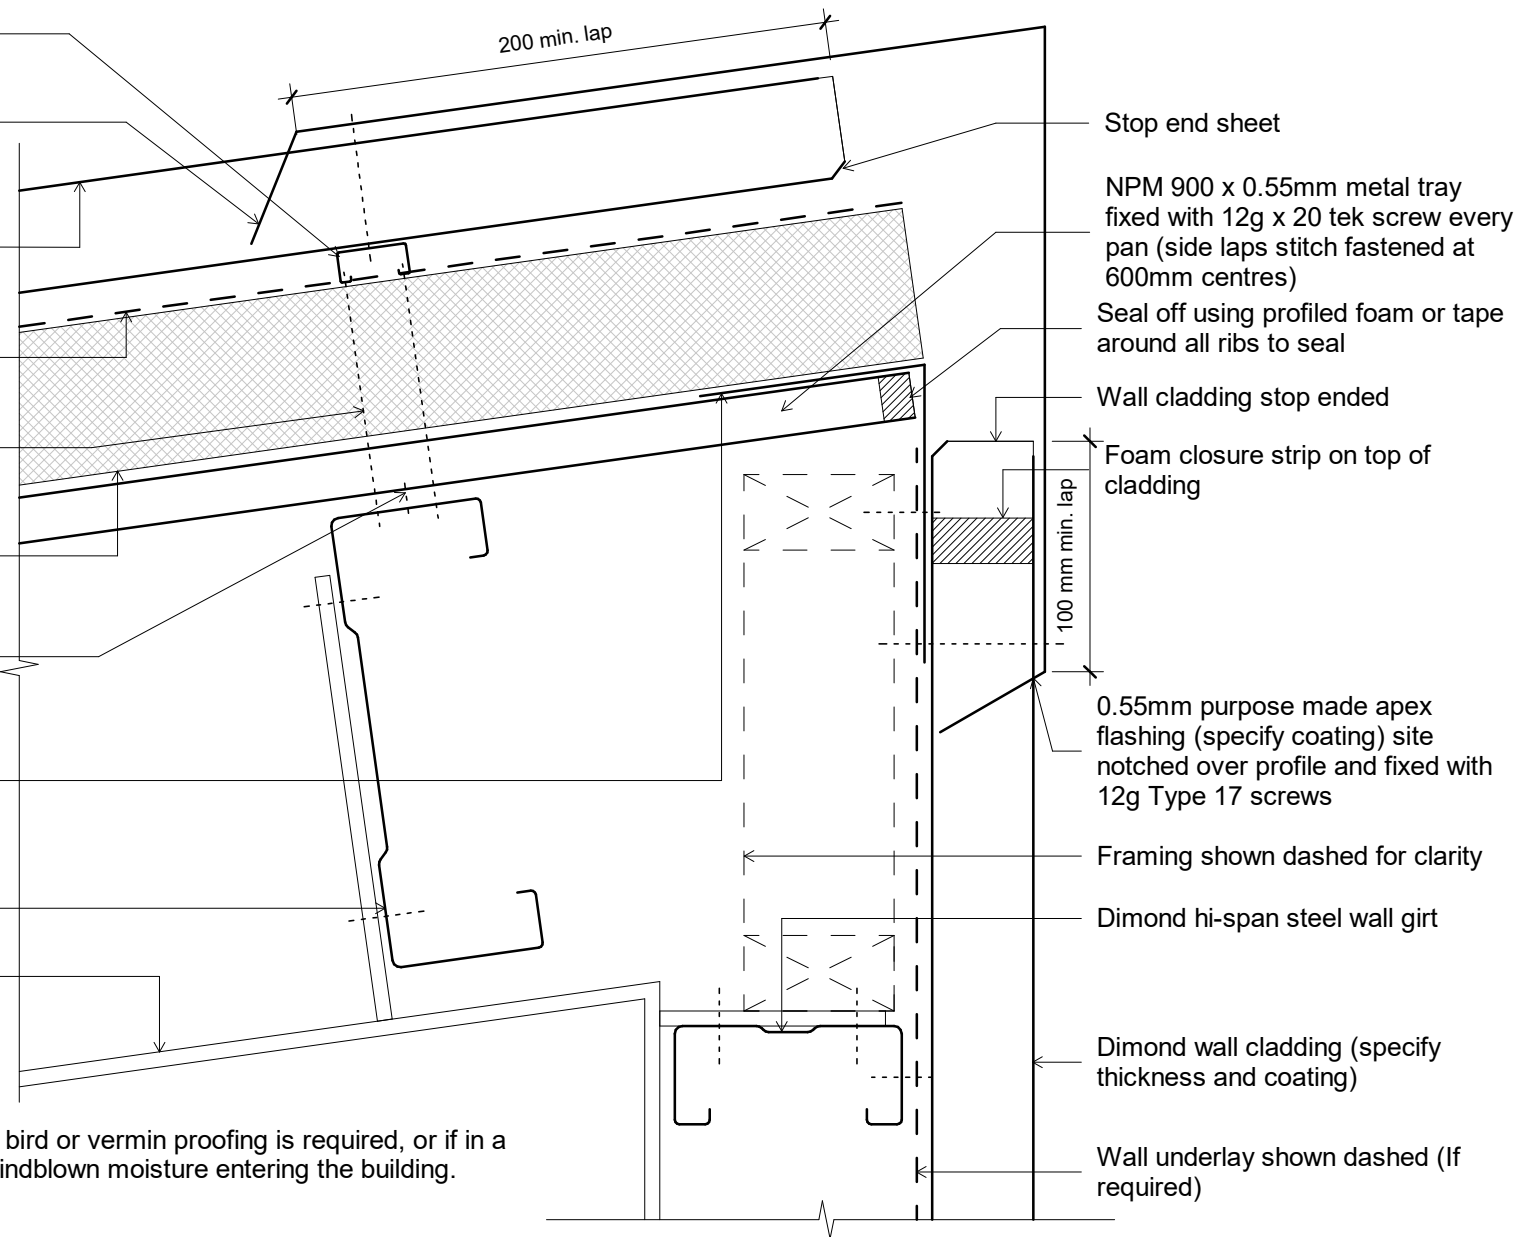

Original Size A4