

Dimondek® 630 roofing (specify thickness and coating)

Apron flashing

175x175x125 or 175x300x125 Dimond fascia gutter

6mm diameter 20mm long g.m.s. gutter bolt


Extended 6mm flat galvanised external gutter bracket fixed at 600mm c/c max. laid to fall

Wall cladding (specify thickness and coating)

Notes:

- Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.

- These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

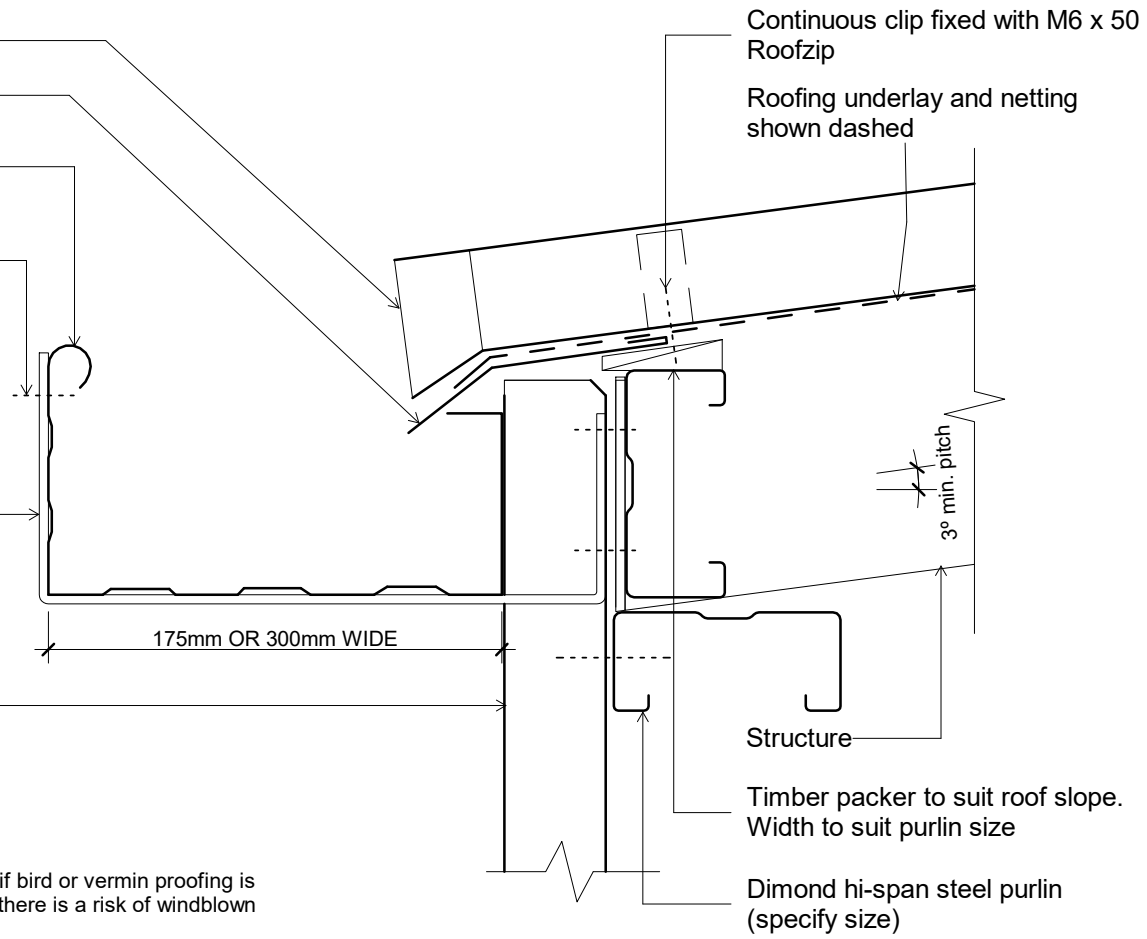

Original Size A4



Dimondek 630
Roof
Eaves Box Gutter

File: dim_dd6_1040 Eaves Box Gutter	
Issue: 01	Reference dim_dd6_1040
Scale: 1 : 5	
Date: 28 November 2018	