


0.55mm Flashing fixed with M6 x 25 Roofzip to a Dimond thermal expansion flashing clip every 2nd pan.

0.55mm barge flashing to cover 2 corrugations (min.)

Roofing underlay and netting shown dashed

Dimondek® 630 roofing (specify thickness and coating)

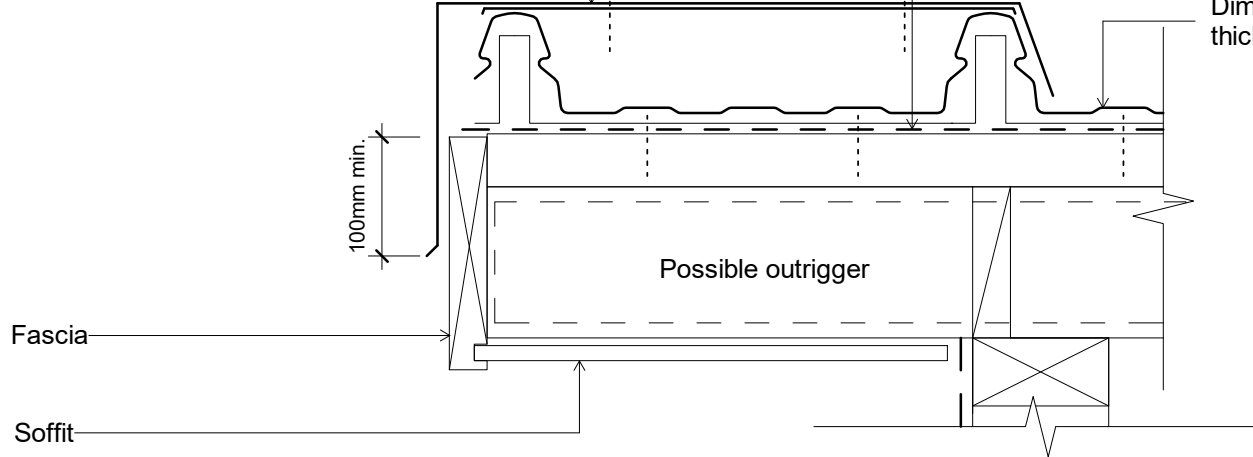

Notes:

- Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.
- These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

Original Size A4



Dimondek 630
Roof
Barge - Raking end

File:	dim_dd6_1140 Barge - Raking end	
Issue:	01	Reference
Scale:	1 : 5	
Date:	28 November 2018	
		dim_dd6_1140