

Climaseal coated self drilling M6 x 50 Roofzip with neo rib fixed

Additional flashing for high wind exposure notched over lower roof profile


Foam closure strip under roofing (see note below)

Fix with self drilling 12g x 25mm T17 for high wind exposure

Potential dirt build-up

Dimond Six Rib Roofing (specify thickness and coating)

Dimond hi-span cold rolled steel purlin (specify size)

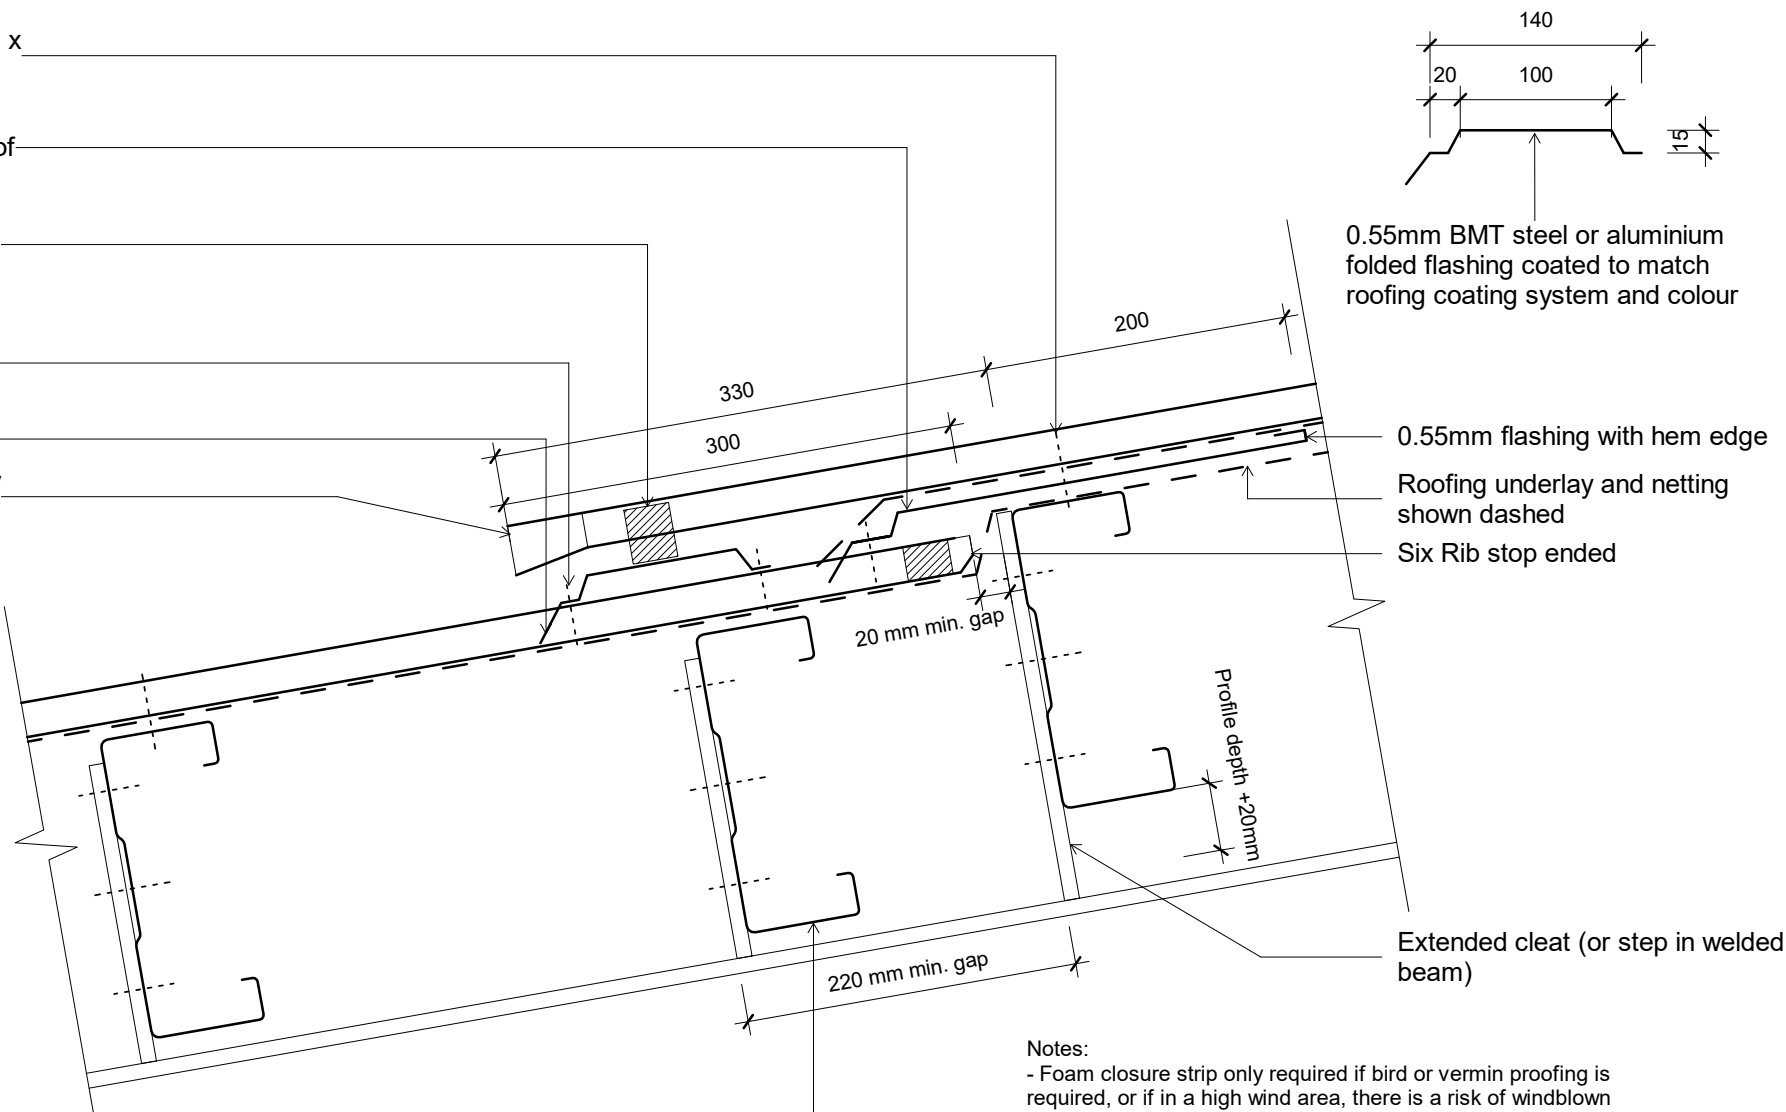

0.55mm BMT steel or aluminium folded flashing coated to match roofing coating system and colour

0.55mm flashing with hem edge

Roofing underlay and netting shown dashed

Six Rib stop ended

Extended cleat (or step in welded beam)

- Notes:
- Foam closure strip only required if bird or vermin proofing is required, or if in a high wind area, there is a risk of windblown moisture entering the building.
 - Leave foam out if ventilation is required.
 - These details are suitably fixed to allow for a theoretical thermal movement of up to 10mm. For thermal movement greater than this a clipping system should be considered.

Original Size A4



Six Rib Roof
Step in Roofing

dim_sxr_1070 Step in Roofing	
Issue: 01	Reference dim_sxr_1070
Scale: 1 : 5	
Date: 20 December 2018	