




Dimond® Roofing Product Storage Guidelines

How to correctly store our roof and wall sheets

If you are storing Dimond Roof or Wall Sheets during lock-down, please note the following to ensure that the product has been stored correctly and protected from the elements.

ALL COMPONENTS STORED ON SITE MUST BE KEPT DRY AND CLEAR OF THE GROUND

Covers must be placed over the material to ensure it does not become wet during any extended storage period and the covers must remain clear of the material surface so air can circulate freely around the bundle.

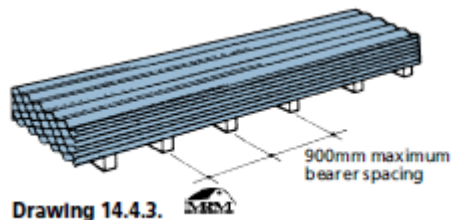

Product with strippable film applied must not be exposed to direct sunlight during storage.

The need to keep the sheets dry applies to all metal types, for example if aluminium is stored wet it will suffer black staining that detracts from the appearance and must be replaced.

ALSO CHECK

If for some reason product has been stored wet or not covered during a lockdown storage period, the sheets must be replaced and not used.

If sheets do become wet and have remained wet for a short period of time (less than 3 days), check their condition, and if there are no signs of damage, then they must first be removed from the stack, immediately dried thoroughly and re-stacked with timber fillets being placed evenly between the sheets to ensure air can circulate freely over the sheet surfaces.