



Heritage Tray™ in Slate

It's got the looks, but won't cost the earth.

Dimond® Roofing's new and improved roof cladding profile, Heritage Tray™ represents the evolution of its already popular Eurotray® product line, with a new emphasis on economy and flexibility.

Conceived around the market leading stylishness of its predecessor, Heritage Tray™ has the advantage of requiring no additional plywood substrate, thus reducing costs. Additionally, Heritage Tray™ offers the flexibility of being roll formed on-site, an ideal solution where extra-long trays are required, storage is limited or potential transport damage needs to be eliminated. Heritage Tray™ comes with a cost saving custom flashing solution for eaves and retains its warranty if you later decide to install a solar PV Laminate. For the architect or builder wishing to utilise a stylish profile in their designs, while at the same time reduce overall project costs, Heritage Tray™ represents a smart solution.



masterspec partner





Heritage Tray™

Residential, Alpine

A Profile That Offers Genuine Savings.

Modeled after our popular Eurotray® product line, Heritage Tray™ represents an elegant solution. The profile has a higher rib for lower pitches and a clip system that reduces oil canning. It requires no plywood substrate, thus saving on costs, and can be flexibly roll formed on-site.


Design Note

Oil canning, flatness or waviness is a condition that may occur:

- (1) during the roll forming process
- (2) under thermal expansion, or
- (3) during the installation process.

It may be more noticeable with wide panned profiles or when using softer materials like aluminium. This does not cause any damage to the product, however the builder/architect needs to be aware that this may affect aesthetic outcomes. Please refer to the NZ Metal Roofing Code Practice- Section 2.3.5

Heritage Tray™ Cross Sectional Profile Drawing

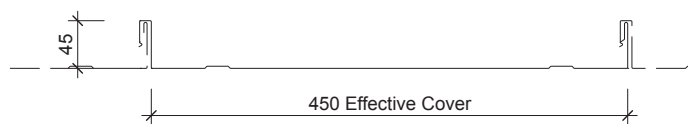

Note: All dimensions are nominal.

Heritage Tray™ Specifications

BMT	Min Pitch	Max Span (Int/End)	Weight/mtr
0.55mm	3°	500 / 500	2.77
0.90mm Alu	3°	500 / 500	1.48

Additional Profile Information

Available in the following materials:

- Unpainted Zinalume®, Galvanised or Aluminium
- Prepainted ColorCote® – ZinaCore™, MagnaFlow™, AlumiGard™

Notes: Please consult with a Dimond® Representative before ordering for:

1. The correct coat to suit your roof to match the environment.
2. Availability of any non standard colours, materials or thicknesses.

Maintenance must be carried out on your new roof to ensure the roof meets the required durability according to the New Zealand Building Code and material warranty.